

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
25 July 2002 (25.07.2002)


PCT

(10) International Publication Number  
WO 02/058169 A2

- (51) International Patent Classification<sup>7</sup>: H01M (74) Agent: CHILD, John, S., Jr.; Dann, Dorfman, Herrell and Skillman, Suite 720, 1601 Market Street, Philadelphia, PA 19103 (US).
- (21) International Application Number: PCT/US01/51149
- (22) International Filing Date:  
9 November 2001 (09.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/247,444 9 November 2000 (09.11.2000) US  
60/269,525 19 February 2001 (19.02.2001) US  
60/308,313 27 July 2001 (27.07.2001) US
- (71) Applicant (for all designated States except US):  
TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA [US/US]; 3700 Market Street, Suite 300, Philadelphia, PA 19104-3147 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GORTE, Raymond, J. [US/US]; 512 Broad Acres Road, Narberth, PA 19072 (US). VOHS, John, M. [US/US]; 45 Sawgrass Lane, Newtown Square, PA 19073 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: THE USE OF SULFUR-CONTAINING FUELS FOR DIRECT OXIDATION FUEL CELLS

SOFCs can theoretically operate on hydrocarbon fuels

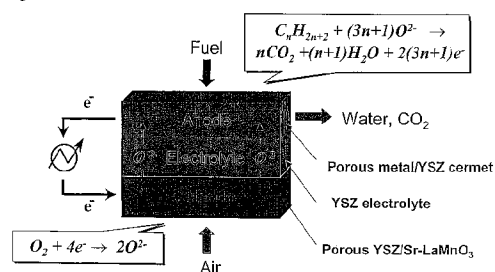

(57) Abstract: The invention relates to a solid oxide fuel cell which comprises a solid electrolyte comprised of an electronic insulator which allows transfer of anions, a ceramic-metal composite anode and a cathode. The fuel cell also comprises a sulfur-containing hydrocarbon fuel having a sulfur content of from about 1 ppm to about 5000 ppm and an oxygen source. The invention further relates to a process of producing electrical energy with the fuel cell and a process of restoring the operability of a fuel cell that was deactivated by sulfur poisoning. The invention also relates to a method for preparation of a porous cermet as a direct-oxidation anode with supported electrolyte structure for a solid-oxide fuel cell using a nickel cermet. The nickel cermet is leached to remove at least part of the nickel, thereby producing a porous oxide. The resulting porous oxide is then impregnated, preferably with a salt of copper, which is calcined to CuO, then reduced to elemental copper. The resulting copper cermet or copper-nickel alloy cermet can be used as the direct-oxidation anode. The starting material for the nickel cermet is preferably a tape formed from a slurry comprising NiO and a ceramic powder comprising YSZ. This tape is combined into an assemblage with one or two additional tapes cast from a slurry comprising a ceramic powder. The invention further relates to a solid-oxide fuel cell comprising an anode material with supported electrolyte structure made by this method and a process for producing electrical energy using this fuel cell.

## THE USE OF SULFUR-CONTAINING FUELS FOR DIRECT OXIDATION FUEL CELLS

By Raymond J. Gorte and John M. Vohs

### **Background Of The Invention**

#### **Cross-Reference To Related Applications**

This patent application claims the benefit of pending United States Provisional Patent Application No. 60/247,444 filed November 9, 2000, pending United States Provisional Patent Application No. 60/269,525 filed February 19, 2001, and pending United States Provisional Patent Application No. 60/308,313, filed July 27, 2001, the entire disclosures of which are incorporated by reference herein.

### **Field Of The Invention**

This invention relates to fuel cell technology and more particularly to a solid oxide fuel cell capable of being operated with a sulfur-containing hydrocarbon fuel, as well as methods of fabrication of such fuel cells and their use for producing electric energy.

### **Description of Prior Art**

Solid-oxide fuel cells (SOFCs) have grown in recognition as a viable, high temperature source of electric energy. As the operating temperatures of these fuel cells typically exceed 600°C and may be as high as 1,000°C, the materials used for the cell components are limited to those that are stable at such temperatures. The electrolyte of the cells is made primarily from dense ceramic materials. The electrolyte conducts oxygen anions ( $O^{2-}$ ) but is an electronic insulator.

It is known to prepare anode materials for solid-oxide fuel cells using nickel (Ni) cermets prepared from NiO and yttria-stabilized zirconia (YSZ) powders. N.Q. Minh, *Journal of the American Ceramic Society*, 76: 563 (1993), the entire disclosure of which is

incorporated by reference herein. High-temperature calcination at greater than 1200°C is essential in order to obtain the necessary ionic conductivity in the YSZ portion of the anode.

In most conventional fuel cells, hydrogen gas is either fed directly to the anode or produced by steam reforming of hydrocarbons, such as methane. Steam reforming is costly and adds significant complexity to the system. It has been proposed to use dry methane; however, Ni catalyzes the formation of carbon fibers in dry methane, resulting in carbon formation on the anode. Ni-containing anodes can be used only if the fuel cells incorporating them are operated at steam/methane ratios greater than 1.7. However, there are significant advantages to be gained by operating under dry conditions. These include easier management of heat, no requirement of adding steam, and the possibility of lower operating temperatures due to the fact that equilibrium for direct oxidation is always favorable.

Some of the shortcomings of nickel-based anode materials in SOFCs have been overcome by the use of copper-containing anodes. See, for example, R. Gorte *et al.*, *Advanced Materials*, 12: 1465–69 (2000), the entire disclosure of which is incorporated by reference herein. It has been shown that replacement of nickel with copper in the anode material avoids the problem of carbon formation, when using dry hydrocarbon fuels. See S. Park, *et al.*, *Nature*, 404: 265–57 (2000), the entire disclosure of which is incorporated by reference herein.

Fuel cells are normally operated with hydrogen as the fuel. It has been proposed to replace hydrogen with commercially available and more economical hydrocarbon fuels such as natural gas, gasoline, diesel fuel, naphtha, fuel oil and the like. Such raw fuels are not currently in use as a fuel source suitable for a fuel cell because these fuels contain relatively high levels of sulfur, often as naturally-occurring complex organic sulfur compounds. For

example, gasoline sold in the United States has an average sulfur level of 300 ppm. Also, sulfur compounds such as mercaptans and thiols are added as odorants to natural gas at levels between 10 and 20 ppm so that leaks may be detected.

Most conventional fuel cells are operated on hydrogen gas. Oxidation in the presence of sulfur results in a poisoning effect on catalysts used in the hydrogen generation system, often including the fuel cell anode catalyst. Accordingly, the hydrocarbon fuels currently in use in fuel cells are routinely desulfurized and then reformed to hydrogen gas.

In one such operation, conventional fuel-processing systems used with stationary fuel cell power plants include a thermal steam reformer, such as that described in United States Patent No. 5,516,344. In such a fuel-processing system, sulfur is removed by conventional hydrodesulfurization techniques, which typically rely on a certain level of recycle as a source of hydrogen for the process. The recycle hydrogen combines with the organic sulfur compounds to form hydrogen sulfide within a catalytic bed. The hydrogen sulfide is then removed, using a zinc oxide bed to form zinc sulfide. The general hydrodesulfurization process is disclosed in detail in United States Patent No. 5,292,428. While this system can be used in large stationary applications, it adds significant complexity to the systems.

Other fuel-processing systems, such as conventional auto-thermal reformers, which have a higher operating temperature than conventional thermal steam reformers, can produce hydrogen-rich gas in the presence of the aforesaid complex organic sulfur compounds without prior desulfurization. According to United States Patent No. 6,159,256, when using an autothermal reformer to process raw fuels containing complex organic sulfur compounds, the result is a loss of autothermal reformer catalyst effectiveness and useful catalyst life of the remainder of the fuel-processing system. Before feeding the reformat to the fuel cell, it has

been reported that the H<sub>2</sub>S concentration must be decreased to 0.05 ppm. Y. Matsuzaki and I. Yasuda, "SOFC VII, Proceeding of the 7<sup>th</sup> Intern. Symp.," Electrochemical Society, Pennington, NJ, 2001:16 (2001), p. 769.

Alternatively, sulfur, in the form of hydrogen sulfide, can be removed from the gas stream by passing the gas stream through a liquid scrubber, such as sodium hydroxide, potassium hydroxide or amines. Liquid scrubbers are large and heavy and are, therefore, useful principally only in stationary fuel cell power systems.

### **Summary Of The Invention**

It is an objective of this invention to overcome the problems associated with the presence of complex organic sulfur compounds in a hydrocarbon fuel stream for use in a fuel cell, without increasing fuel-processing complexity.

It is a further objective of this invention to provide a fuel cell that can operate with a sulfur-containing hydrocarbon fuel.

It is another objective of this invention to provide a fuel cell that can operate with fuel that does not have to undergo prior treatment to remove complex organic sulfur compounds.

It is yet a further objective of this invention to provide a process by which a fuel cell that is contaminated by sulfur can be restored to full performance after being deactivated by sulfur poisoning.

It is another objective of this invention to provide a method of fabricating a porous, direct-oxidation anode for a solid-oxide fuel cell starting from a nickel cermet.

It is another objective of this invention to provide a method for preparing a layered ceramic structure comprising a direct oxidation anode with a supported electrolyte, which may incorporate an additional layer to impart greater strength to the structure.

It is a further objective of this invention to provide a method for preparation of a porous copper or Ni-Cu alloy cermet for use as a porous direct-oxidation anode for a solid-oxide fuel cell.

It is yet another objective of this invention to provide a solid-oxide fuel cell, having a ceramic-metal alloy composite anode, which operates efficiently using a dry hydrocarbon fuel containing sulfur.

It is still another objective of the present invention to provide a process of producing electrical energy by means of the above-described SOFC.

These and other objectives are achieved according to the present invention, which is embodied in a solid oxide fuel cell comprising a solid electrolyte that is an electronic insulator which allows transfer of anions, a ceramic-metal composite anode and a cathode, and which operates using a fuel comprising a sulfur-containing hydrocarbon and having a sulfur content of from about 1 ppm to about 5000 ppm and an oxygen source.

The hydrocarbon may be a petroleum distillate selected from the group consisting of gasoline, diesel oil, naphtha, JP-4, JP-5, JP-8, kerosene, motor oil, natural gas, and fuel oil. Other preferred hydrocarbons and their derivatives are alcohols including ethanol and methanol and dry methane, butane, toluene and decane. Mixtures of hydrocarbons can also be used. The sulfur-containing fuels preferably have a sulfur concentration of from about 1 ppm to about 1000 ppm and more preferably a sulfur concentration of from about 1 ppm to about 500 ppm.

The invention also provides a process of producing electrical energy. The process of the invention comprises providing a solid oxide fuel cell comprising a solid electrolyte that is an electronic insulator which allows transfer of anions, a ceramic-metal composite anode and

a cathode, and the further steps of contacting the fuel cell cathode with an oxygen source and contacting the anode with a fuel comprising a sulfur-containing hydrocarbon having a sulfur content of about 1 ppm to about 5000 ppm.

The invention additionally provides a process for restoring the performance of a fuel  
5 cell deactivated by sulfur poisoning, by heating the anode in steam for a period of time sufficient to effect removal of the sulfur.

The present invention further provides a method of fabricating a porous copper cermet or copper-nickel alloy cermet from a sintered nickel cermet with nickel content between about 10% and about 60% for use as a direct-oxidation anode. The method comprises  
10 leaching at least a part of the nickel from the cermet, thereby increasing the cermet's porosity. Cu is then added back into the pore structure to obtain a Cu cermet. In one embodiment, the porous structure is impregnated with a soluble, copper-containing impregnant, preferably a copper salt. The impregnated cermet is subjected to a temperature sufficient to convert the copper-containing impregnant to copper oxide which, in turn is reduced to elemental copper,  
15 resulting in the formation of a copper cermet or copper-nickel alloy cermet, depending on the amount of nickel removed during the leaching step.

In a preferred embodiment, a multi-layer ceramic piece is fabricated with one layer containing NiO and YSZ and the other YSZ only. These layers can each be formed by conventional tape casting methodology. In carrying out this embodiment of the invention, a  
20 slurry of the first tape casting formulation, comprising a binder, a carrier medium and a ceramic powder comprising nickel oxide and yttrium-stabilized zirconia (YSZ), and optimally, an organic pore forming agent, is applied to a supporting substrate (such as Mylar® film) and formed into a first tape. A second tape casting formulation is prepared in

the form of a slurry comprising a binder, a carrier medium and a ceramic powder, at least a portion of which is YSZ. The slurry of the second tape casting formulation is applied to a supporting substrate, which may be the first tape, and formed into a second tape. This second tape, after sintering, forms a dense YSZ which serves as the electrolyte.

5           The first tape and the second tape are superposed one on the other to provide a laminate preform. The laminate preform is heated to a temperature sufficient to sinter the ceramic powder, after which the nickel oxide is reduced to elemental nickel. The resulting laminate is thereafter processed in the manner described above for converting a nickel cermet to a direct-oxidation anode material.

10           The present invention also provides a method of strengthening the above-described direct-oxidation anode with (or without) the supported electrolyte. The method involves forming another tape casting formulation which is used to provide a reinforcing layer on the aforementioned laminate preform. The formulation is in the form of a slurry comprising a binder, a carrier and a ceramic powder comprising YSZ, or another compound, whose  
15           coefficient of thermal expansion, when sintered, is compatible with that of sintered YSZ. A slurry of this third tape casting formulation is applied to a supporting substrate and formed into a third tape. The thickness of the third tape is relatively thicker than the thickness of the second tape. The third tape is perforated to form at least one aperture, and preferably several apertures, through the thickness of the tape. The perforated third tape is superimposed upon  
20           the porous first tape. The three-layer preform is then sintered and further processed to remove Ni in the manner described above to produce a reinforced direct-oxidation anode with supported electrolyte structure. The resulting three-layer structure has greater mechanical strength than the two-layer laminate.



The present invention also provides a solid-oxide fuel cell comprising a solid electrolyte comprised of an electrical insulator which allows transfer of anions, an anode and a cathode. The anode material, with or without supported electrolyte, is prepared using the methods described above.

5           The present invention additionally provides a process of producing electrical energy. This process comprises the steps of providing the solid-oxide fuel cell described immediately above, contacting the cathode of that fuel cell with an oxygen source and contacting the anode of that fuel cell with a fuel.

### **Brief Description of the Drawings**

- 10           **FIGURE 1A**    is a diagrammatic illustration of the operation of a solid-oxide fuel cell of the invention.
- FIGURE 1B**    is a diagrammatic illustration of a fuel cell which is suitable for use in practicing the present invention.
- FIGURES**     **2A, 2B, 2C, 2D AND 2E** provide a diagrammatic illustration of the preferred method of fabricating an anode of the invention.
- 15           **FIGURE 3**     is a diagrammatic illustration of the process for fabricating in accordance with this invention.
- FIGURE 4A**    is a photograph of the three green tapes used to make the reinforced, direct-oxidation anode with supported electrolyte, along with the post-
- 20           fired structure.
- FIGURE 4B**    is a diagrammatic side view illustration of components of a solid-oxide fuel cell.

**FIGURE 5** depicts voltage and current density results obtained with the fuel cell of the invention using sulfur-free decane, toluene and diesel oil as fuel.

**FIGURE 6** depicts the voltage and current density produced from the cell of the type shown in **FIGURE 1B** using n-decane containing different concentrations of sulfur.

**FIGURE 7** depicts the maximum current density of a fuel cell operated with 40 wt% n-decane containing 5000 ppm sulfur in dry nitrogen in a fuel cell having a ceria-free copper-yttria stabilized zirconium anode.

**FIGURE 8** depicts the voltage and current density of a fuel cell having an anode with a copper-ceria-yttria stabilized zirconia anode and operated with 40 wt% n-decane containing 5000 ppm sulfur in nitrogen gas.

**FIGURE 9** depicts x-ray diffraction results for a copper-ceria-yttria stabilized zirconium anode after various treatment conditions.

**FIGURE 10** depicts voltage and current density results for the fuel cell operated with 40% commercial gasoline in dry nitrogen gas.

**FIGURE 11** depicts voltage and current density results for the fuel cell operated with 10% commercial gasoline in dry nitrogen.

**FIGURE 12** depicts voltage and current density results for the fuel cell operated with decane containing different concentrations of sulfur.

**FIGURE 13** depicts the change in resistance of the Cu-formed anode in a hydrocarbon fuel containing 5000 ppm sulfur as that conductor is heated to 700°C.

**FIGURE 14** is a graphical representation of fuel-cell performance as compared to current density curves for the operation of the solid-oxide fuel cell of the invention at 700°C using hydrogen and butane as the fuels.

Hydrogen is represented in the curves by a circle and butane by a square. The light circle and square denote results relating to cell voltage. The bold circle and square denote results relating to power density.

### **Description of Preferred Embodiments**

**FIGURES 1A and 1B** are, respectively, diagrammatic representations of the operation of a solid oxide fuel cell and the operation of a fuel cell of the invention. According to **FIGURES 1A and 1B**, molecular  $O_2$  from an oxygen source is reduced to  $O^{2-}$  anions at the cathode, after which the  $O^{2-}$  diffuses through the electrolyte to the anode, where it oxidizes the fuel, in this case, a hydrocarbon fuel. The external current is produced by the flow of electrons from the anode through an external circuit to the cathode. Water and carbon dioxide are also produced by the oxidation reaction at the anode, and are removed from the fuel cell.

The electrolyte is an electronic insulator which allows transfer of ions. The electrolyte is preferably an oxide ion conducting material. Suitable oxide ion conducting materials include doped ceria such as gadolinium-doped ceria, samarium-doped ceria, doped zirconia such as scandium-doped zirconia, yttria-doped zirconia and calcium-doped zirconia and doped lanthanum gallate such as strontium-doped lanthanum gallium oxide. Other suitable oxide ion conducting materials are bismuth oxides or vanadates, perovskites containing manganese, cobalt, iron, nickel, vanadium, chromium or other metals. Preferably the electronic insulator is a doped ceria or doped zirconia and is most preferably yttrium-

stabilized zirconia. *See*, for example, United States Patent Nos. 6,214,485 to Barnett et al., and 6,303,098 to Kramarz et al., which patents are incorporated herein by reference, and United States Patent No. 5,670,270 to Wallin.

The anode/electrolyte structure of the fuel cell of the invention may be prepared by any suitable method, some of which are exemplified directly below. For example, the unsintered mixture of electronically-conductive and ionically-conductive materials may be deposited on a layer comprising a sintered or unsintered ionically-conductive electrolyte material prior to being sintered, to ensure sufficient contact between the layers, as illustrated in the process of the second aspect of the invention. In one embodiment of such a process, the mixture of ionically-conductive and electronically-conductive materials is deposited on an unsintered layer of electrolyte material and the mixture and electrolyte layer are sintered simultaneously. In another embodiment, the mixture is deposited on a previously sintered layer of electrolyte, and then sintered.

The mixture of ionically-conductive and electronically-conductive particles may be applied to the layer comprising particles of an electrolyte material (hereafter "electrolyte layer"), by any suitable means such as, for example, tape casting methods, screen-printing or silk-screening a slurry of the material(s) onto the electrolyte structure.

Other means of forming the electrode/electrolyte structure are tape calendering and slip casting. Tape calendering generally includes the steps of forming an electronically conductive tape from an electronically conductive component as well as forming an electrolyte tape from an electrolyte component. The tapes are then rolled together to form a multilayer composite tape. In slip casting, a slurry of a conductive ceramic material and a liquid vehicle such as water, optionally with an organic binder and surfactants is cast into a

mold to provide the desired shaped article. The specific amounts of ceramic material, organic binder and liquid vehicle can be varied depending on the density desired in the cast product. The resulting cast product is dried and fired by conventional means to produce the desired electrode. *See also*, for example, United States Patent Nos. 6,270,536 to Minh, and  
5 5,670,270 to Wallin, the entire disclosures of which patents are incorporated herein by reference.

In a preferred embodiment of this invention, the ceramic-metal composite anode of the fuel cell is preferably prepared as illustrated in FIGURES 2A, 2B, 2C, 2D and 2E. In this method, yttria-stabilized zirconium (YSZ) powder is mixed with a polymer and spread onto a  
10 suitable film material, *e.g.*, Mylar®, to form a green tape. Next, a similar polymer-YSZ slurry is mixed with a pore former and applied to the exposed surface of the first tape, which contains no pore former. The cast tapes are then co-sintered to form a porous layer consisting essentially of porous YSZ on a generally planar sheet of relatively dense YSZ. The pore former, *e.g.*, carbon particles, is consumed during the sintering step and substantially none  
15 remains in the resulting porous YSZ layer.

Thereafter, copper is incorporated into the anode material by aqueous impregnation using a concentrated salt solution, *e.g.*,  $\text{Cu}(\text{NO}_3)_2$ , followed by calcination to a temperature on the order of 600°C for a period of about two hours, which decomposes the nitrates and forms oxides. Reduction of the copper oxide yields the elemental form of copper. The resulting  
20 material has sufficient mechanical strength for anode-supported electrolytes.

The metal content of the anode material is at least 10%, preferably 25%, and more preferably at least 35% by weight.

Copper is the preferred metal for use in the anode, but the metal may be an alloy such as copper with a second conductive metal. The alloy contains between about 5% and about 95% by weight copper and about 5% to about 95% by weight of the second metal, and more preferably between about 50% and about 90% by weight copper and about 10% to about 50%  
5 by weight of the second metal. One hundred percent (100%) Cu is preferred.

Other components including ceria oxide ( $\text{CeO}_2$ ), are preferably added using the same impregnation methods.  $\text{CeO}_2$  plays a dual role in the anode. First, it provides ionic and electronic conductivity, thereby increasing the reaction zone created where the gas phase, the ionic conductor and the electronic conductor come together, which is commonly referred  
10 to as the three-phase boundary or TPB. Secondly,  $\text{CeO}_2$  provides catalytic activity for the oxidation of hydrocarbons.

The term "consisting essentially of yttria-stabilized zirconia," as used herein in reference to the porous layer of the ceramic-metal composite anode, is intended to signify the substantial absence from such layer of any fibrous component whose function is to impart  
15 porosity to the layer by becoming a component of the finished anode material (in contrast to pore formers that are consumed during sintering), and, in particular, to the absence of zircon fibers and the like which, due to siliceous surface coating, have a detrimental effect on SOFC performance.

The term "oxygen source," as used herein, refers to air and oxygen in more purified  
20 form than present in air.

The term "fuel," as used herein, refers to hydrogen and any hydrocarbon fuel, wherein hydrocarbon is defined as any flammable compound that consists of, or includes as primary elements, hydrogen, carbon and oxygen.

As noted above, conventional fuel cells have used hydrogen as fuel. The solid oxide fuel cells of the invention are intended to be operated with a wide variety of hydrocarbon fuels, including mixtures of these fuels. Sulfur-containing hydrocarbons can also be used. These include, without limitation, petroleum distillates such as gasoline, diesel oil, naphtha, JP-4, JP-5, JP-8, kerosene, motor oil, natural gas and fuel oil. Other preferred hydrocarbons and derivatives are alcohols, including ethanol and methanol, and dry methane, butane, toluene and decane. The fuel cell of the invention is normally operated at about 650 – 900°C.

The fuel cell of the invention can operate successfully with hydrocarbons containing between 1 ppm and 5000 ppm sulfur. As demonstrated herebelow, the fuel cell of the invention is operated successfully with hydrocarbons containing between 250 ppm and 5000 ppm sulfur including 500 ppm and 1000 ppm sulfur. It is preferred to use as fuel hydrocarbons containing from 1 ppm to 1000 ppm sulfur and more preferably from 1 ppm to 500 ppm sulfur. Commercial gasoline is a suitable fuel. Depending upon state regulations and other requirements, commercial gasoline typically has about 300 ppm sulfur but may have, for example, sulfur concentrations of less than about 10 ppm, about 10 ppm, about 20 ppm, or about 100 ppm.

As noted above, the efficiency of the fuel cell does not appear to be noticeably affected by the use of hydrocarbons with sulfur concentrations below 1000 ppm for a process such as a cyclic process, in which the fuel cell is operated for ten (10) hours or less. For a process involving continuous use of the fuel cell for one hundred (100) hours or more, the efficiency of the fuel cell does not appear to be noticeably affected by the use of hydrocarbons with sulfur concentrations below 100 ppm. In the event that the fuel cell becomes deactivated by sulfur poisoning, the performance of the cell can be restored by heating the

anode in steam. In a preferred embodiment, this heating process is carried out in a mixture of steam and a dilutant, preferably N<sub>2</sub> or CO<sub>2</sub>. Preferred ratios of steam to CO<sub>2</sub> are between 100:0 and 5:95. The anode is preferably heated for reactivation at a temperature of between about 600°C and about 800°C, and preferably at about 700°C for a period of one (1) to five (5) hours, and most preferably, for about one (1) hour to about three (3) hours.

In accordance with a preferred feature of the invention shown diagrammatically in FIGURE 3, the starting material is a nickel cermet (Ni and YSZ composite, containing at least 10% Ni so as to provide electronic conductivity) prepared by any known technique. *See, for example, N.Q. Minh, Journal of the American Ceramic Society. 76: 563 (1993).* The reduction of NiO to elemental nickel imparts a porous character to the cermet. The cermet is contacted with a leaching agent to remove at least a portion of the nickel, thereby increasing the porosity of the cermet. The porous cermet is next contacted with a copper-containing impregnant. The porous copper-containing cermet is then further treated to form a porous copper cermet or copper-nickel alloy cermet (depending on the amount of nickel removed during leaching), which is used as the direct-oxidation anode material for a solid-oxide fuel cell.

In the preferred embodiment referenced above, the ceramic powder of the first tape casting formulation comprises a ceramic powder containing NiO and YSZ, a binder and water as the carrier, so as to form a slurry. The backing sheet is preferably a Mylar® cellulose acetate film. The first tape casting formulation also preferably includes glycerol as a plasticizer and a pore former. The slurry of the first tape casting formulation is applied to a supporting substrate and formed into a first tape.



Then a second tape casting formulation is prepared in the form of a slurry comprising a binder, a carrier medium and a YSZ powder. The second tape casting formulation does not contain any ingredient functioning as a pore former. The slurry of the second tape casting formulation is applied to a supporting substrate and formed into a second tape. The first tape  
5 may conveniently serve as the supporting substrate for the second tape, or a separate backing material can be used, if desired. In either case, the tapes are superposed one on the other to form an assemblage, and after sintering, the first tape is converted to the direct-oxidation anode, whereas the second tape becomes the supported electrolyte.

The amount of water used in the tape casting slurry is preferably about 20–40 wt. %  
10 based on the total weight of the composition. The formulations may additionally contain minor amounts of known processing expedients such as dispersants and defoaming agents. The amount of dispersant and defoaming agent may comprise about 1–5 wt. % and 0.05–0.5 wt. %, respectively, based upon the weight of the ceramic powder.

In a preferred embodiment, the first tape casting formulation also contains in addition  
15 to NiO another pore-forming agent. It is preferred that the other pore-forming agent is an organic material. A particularly preferred pore-forming agent is powdered graphite.

The multi-layer tape is typically removed from the backing sheet to allow the tape to be sintered to form a ceramic article. Removal of the backing sheet may be optional if the sheet is readily decomposed during sintering.

20 The casting may be performed by any known tape-casting technique. The preferred method of casting is a conventional doctor blade tape casting, comprising the following steps. First, the slurry is poured onto a backing sheet which is typically supported by a flat plate. The backing sheet and slurry are then passed under a doctor blade set at a height above

the sheet corresponding to the desired tape thickness. The resulting tape is then dried to increase its strength and decrease tackiness. The binder sets during casting and drying as it cools to room temperature. The dried tape preferably has a thickness of about 25–2,500  $\mu\text{m}$ .

In this preferred embodiment, the time and temperature of sintering of the multi-layer  
5 assemblage, or laminate preform, may vary, but it is preferably carried out at 1,500°C for two hours. The sintering step will consume all or part of any organic pore-forming agent, resulting in the first tape being porous.

After completion of the sintering step, the NiO will be reduced to elemental nickel as shown in FIGURE 3. Typically, this step is effected by reduction in hydrogen gas at a  
10 temperature above 500°C. Then at least part of the elemental nickel is leached from the assemblage. The preferred method of carrying out this step is contacting the assemblage with hot nitric acid, which selectively dissolves nickel with no appreciable dissolution of YSZ. The nitric acid can be replaced, if desired, by another leaching agent that selectively dissolves nickel. Preferably, all of the nickel is leached. In another preferred embodiment, about 50%  
15 to 99% of the nickel is leached. The removal of the nickel results in an increase in the porosity of the first tape.

After completion of the leaching step, the assemblage is impregnated with a copper-containing impregnant, preferably  $\text{Cu}(\text{NO}_3)_2$ . The amount of this material is preferably selected so as to yield an amount of elemental copper that is approximately equivalent to the  
20 weight of elemental nickel leached in the leaching step. The material is converted to copper oxide by calcination at a temperature of at least 600°C. The copper oxide is then reduced to elemental copper, generally by reduction in hydrogen gas at a temperature about 500°C, thereby producing the direct-oxidation anode.

The copper content of the anode material is at least 15%, preferably 25%, and more preferably at least 35% by weight. In the embodiment of the invention in which the metal is copper-nickel alloy, the alloy preferably contains between about 5% and about 95% by weight copper and about 5% to about 95% by weight nickel.

5 Other components, including  $\text{CeO}_2$ , can be added to the anode portion of the assemblage using the same impregnation method described above.  $\text{CeO}_2$  plays a dual role in the anode. First, it provides ionic and electronic conductivity, thereby increasing the reaction zone created where the gas phase, the ionic conductor and the electronic conductor come together, which is commonly referred to as the three-phase boundary, or TPB. Secondly,  
10  $\text{CeO}_2$  provides catalytic activity for the oxidation of hydrocarbons.

The method of preparing a two-layer laminate preform can be modified by incorporating a third tape in the assemblage to serve as a reinforcing layer in the finished structure, as shown in FIGURES 4A and 4B. According to this method, the third tape casting formulation is prepared in the form of a slurry comprising a binder, a carrier and a ceramic  
15 powder, but no pore former. The ceramic powder may comprise YSZ as before or another material such as  $\text{MgAlO}_2$ , which has a coefficient of thermal expansion that is compatible with that of sintered YSZ. The thickness of the third tape is made relatively greater than the thickness of the second tape. The third tape is perforated to form at least one aperture through the thickness of the tape to allow passage of gas and liquid (*e. g.*, copper salt  
20 solution) through the tape. The perforation preferably has a periphery with a continuously curved outline, *i.e.*, no sharp angles that would promote cracking or fracturing of the material. The perforated third tape is superimposed on the laminated preform in contact with the porous, first tape.

The resulting cell is then heated to sinter the ceramic powder at 1,500°C for several hours. Any NiO in the middle layer is then removed by reducing it to Ni and removing it by leaching. Compared with the porous direct-oxidation anode in the two-layer assemblage referenced above, with the addition of this reinforcing layer the three-layer assemblage has greater mechanical integrity.

After the three-layer assemblage is sintered, the cell can undergo the further steps described above in connection with the two-layer assemblage to incorporate therein as a metal conductor, a copper or copper-nickel alloy, as well as CeO<sub>2</sub>. The layers of this assemblage are shown as **FIGURE 4A** along with the post-fired laminate structure. A finished fuel cell (prior to addition of Cu) embodying this aspect of the present invention is shown in **FIGURE 4B**. In the preferred embodiment, the electrolyte layer is < 100µm thick, the porous layer is between about 100 µm and about 1000 µm, and the support is between about 300 µm and about 5,000 µm.

In a solid-oxide fuel cell, the anode must catalyze the reaction of the hydrocarbon fuel with O<sup>2-</sup> from the electrolyte. Because electrons are produced in this reaction, the anode must be electrically conductive. Finally, the anode must have a coefficient of thermal expansion approximating that of the dense YSZ electrolyte to minimize cracking. The copper or copper-nickel anode provides the electrical conductivity or interconnection required of the anode. The copper acts also as an electronic or current collector for the electrons produced during the catalyst reaction of the fuel with O<sup>2-</sup>.

A copper current collector and interconnect in a solid-oxide fuel cell anode would have a variety of forms including, but not limited to, meshes, gauzes, wires, plates (both flat and with ridges or protrusions), tubes, and other structured and pre-formed shapes.

In addition to using current collectors and interconnects that are pure Cu and copper-nickel alloys, other Cu-coated metals may be used. For example, stainless steel will have better mechanical properties than Cu at high temperatures. One method for taking advantage of the mechanical properties of stainless steel or other metals, while maintaining the inert chemical properties of Cu, is to plate Cu onto the structural metal. For these systems, the surface reactivity of the metal is passivated or eliminated via coating with the unreactive Cu. Cu coating allows for the use of a variety of metals in addition to Ni, including, without limitation, Fe, W and metal alloys, such as but not limited to ferritic steels (*e.g.*, FeCrAl alloys), nickel alloys (*e.g.*, Inconel 617) and Cr alloys (*e.g.*,  $\text{Cr}_5\text{FeY}_2\text{O}_3$ ) as current collectors and interconnects in SOFCs that run on dry hydrocarbons. In addition to the enhanced thermal stability of Cu-coated metals, the use of Cu-coated metals and alloys has the added advantage of decreased cost. Cu-coated metals and alloys that are used as current collectors and interconnects could have a wide variety of shapes such as those mentioned above for pure Cu.

The invention can be used in all SOFCs, for portable generators and for use, for example, in automobiles, ship propulsion and electric power generation.

The following **EXAMPLES** are provided merely to illustrate, not to limit the invention.

#### **EXAMPLE 1**

A solid-oxide fuel cell having a porous ceramic-copper composite anode was prepared by the dual tape casting technique described hereinabove, which is set forth in additional detail in R. Gorte *et al.*, *Advanced Materials*, 12:1465–69 (2000).

### EXAMPLE 2

A solid-oxide fuel cell was prepared according to the present invention, as follows. A tape of YSZ powders, polymer binder, and a carbon powder pore former was spread onto one surface of a YSZ tape without pore formers and calcined at 1,500°C for two hours. The cathode was formed from a 50 wt. % physical mixture of Sr-LaMnO<sub>3</sub> and YSZ powder, pasted onto the opposite surface of the densified electrolyte in a glycerol slurry and then heated at 1,250°C for two hours. Thereafter, the porous YSZ layer was impregnated with an aqueous solution of Cu(NO<sub>3</sub>)<sub>2</sub> (Fisher Scientific) and Ce<sub>2</sub>(NO<sub>3</sub>)<sub>3</sub>. After calcination at 950°C for two hours, the copper salt was converted to the metallic form by heating to 800°C in H<sub>2</sub>.

### EXAMPLE 3 (COMPARATIVE TEST)

The solid oxide fuel cells of EXAMPLES 1 and 2 were tested to evaluate their performance using sulfur-free hydrocarbon as the fuel. The fuel cell of EXAMPLE 1 was operated with 40 wt% hydrocarbon in dry nitrogen at 700°C and the electric values of voltage, current density and power density were measured as a function of time. The hydrocarbons employed were decane, toluene and diesel fuel. The results, as shown in FIGURE 5, are typical results obtained for such tests.

### EXAMPLE 4

In order to test the sensitivity of the anodes to sulfur, fuels containing various levels of sulfur were prepared by mixing thiophene with n-decane to achieve sulfur concentrations (wt% sulfur) in the n-decane of 250 ppm, 500 ppm, 1000 ppm and 5000 ppm. The n-decane/thiophene fuel mixture was used as fuel in a fuel cell under conditions set forth above in EXAMPLES 1 and 2. The concentration of the n-decane/thiophene fuel mixture was 40 wt% with dry nitrogen gas making up the rest of the fuel. The results for voltage and current

density measured over time for the n-decane/thiophene fuel mixtures with these various concentrations of sulfur is shown in **FIGURE 6**. These results indicate a very slight decline in performance for the n-decane/thiophene fuel with 250 ppm. **FIGURE 6** also indicates that the n-decane/thiophene fuel showed somewhat greater decrease in performance with increasing concentrations of sulfur. This result is consistent with **FIGURE 5**, which indicates no change in performance over time with the use of n-decane that is sulfur-free. **FIGURE 6** demonstrates that the use of a hydrocarbon fuel comprising n-decane with a sulfur concentration of 250 ppm (prepared by adding thiophene) results in only very slight decreases in performance after twenty-four (24) **FIGURE 6** hours further demonstrates that the use of a hydrocarbon fuel with 1000 ppm sulfur produced a slightly higher rate of decrease in fuel cell performance, but that the fuel cell still operated close to its original capacity for over ten (10) hours. This result demonstrates that the fuel cell can be operated very effectively with hydrocarbons containing at least 1000 ppm sulfur and is operable even when the hydrocarbon fuel contains up to 5000 ppm sulfur.

#### EXAMPLE 5

The test procedures used in **EXAMPLE 4** were repeated with the exception that the fuel cell comprised a ceria-free copper-yttria stabilized zirconia anode. The fuel employed was n-decane with 5000 ppm sulfur (prepared by the addition of thiophene). The fuel cell was operated with the cell shorted (*i.e.*, at the maximum current). Cell current density was measured over time, and the results are shown in **FIGURE 7**. **FIGURE 7** indicates that the current density was unaffected by the high sulfur levels, even after six (6) hours. The open circuit voltage (0.9 Volts) (not shown) was also unaffected. Visual inspection of the anode suggested that the sulfur had no effect on the copper. This inspection, combined with the

data set forth in FIGURE 7, further indicates that the use of hydrocarbon fuel containing very high levels (*i.e.*, 5000 ppm) of sulfur has no effect on the Cu component or on the performance of a cell containing an anode in which copper is used for electrical conductivity. The overall performance of a fuel cell which contains Cu but not ceria, however, was not good, indicating that the inclusion of ceria in the anode enhances performance.

#### EXAMPLE 6

The test conditions referenced in EXAMPLE 4 were repeated except that the fuel cell employed comprised a copper-yttria stabilized zirconia with ceria. The fuel used was again n-decane with the addition of thiophene to produce a sulfur concentration of 5000 ppm. The cell was operated for 24 hours. The results are shown in FIGURE 8. FIGURE 8 indicates that the performance data is similar to earlier results set forth in EXAMPLE 4. FIGURE 6 indicates that fuel cell performance falls over the first five (5) hours but then reaches a steady state. This result is believed to be due to the formation after about five (5) hours of a  $\text{Ce}_2\text{O}_2\text{S}$  phase.

Without wishing to be bound by a particular scientific theory, the results set forth in EXAMPLES 5 and 6 are believed to have occurred for the following reasons. In order to understand the long-term effect of sulfur and whether the Cu-ceria anode will be stable in sulfur-containing environments, it is important to understand the mechanism for sulfur poisoning. At  $700^\circ\text{C}$ , the equilibrium constant for the reaction  $2\text{Cu} + \text{H}_2\text{S} = \text{H}_2 + \text{Cu}_2\text{S}$  is 1500. This implies that Cu will remain metallic in a mixture of  $\text{H}_2$  and  $\text{H}_2\text{S}$  so long as the ratio of  $\text{H}_2:\text{H}_2\text{S}$  remains greater than 1500. While the equilibrium conditions for thiophene in hydrocarbons will be somewhat different from this, the equilibrium conditions suggest that Cu should be stable to sulfur poisoning until very high sulfur levels are produced.



Equilibrium data for the reaction  $2\text{CeO}_2 + \text{H}_2\text{S} + \text{H}_2 = \text{Ce}_2\text{O}_2\text{S} + 2\text{H}_2\text{O}$ , the reaction most likely to lead to poisoning of the  $\text{CeO}_2$  catalyst, are given in D. Alan, R. Kay, W.G. Wilson and V. Jalan, *Journal of Alloys and Compounds*, 1993, 192, the entire disclosure of which is incorporated by reference herein. The stability of the  $\text{Ce}_2\text{O}_2\text{S}$  phase depends on both oxygen chemical potential as well as the sulfur chemical potential. For the typical conditions of fuel-cell anode, where the oxygen chemical potential is approximately  $10^{-20}$  to  $10^{-10}$  atmospheres, the equilibrium data suggests that the  $\text{Ce}_2\text{O}_2\text{S}$  phase will form if the chemical potential of  $\text{H}_2\text{S}$  is above  $10^{-3}$  to  $10^{-4}$  atm.

#### EXAMPLE 7

The fuel cell with a copper-ceria-yttria stabilized zirconia was prepared and operated according to **EXAMPLE 4** with the following additional test conditions. In a first test, the fuel cell was operated with a hydrocarbon fuel containing 250 ppm sulfur for twenty-four (24) hours, then operated with a hydrocarbon fuel containing 500 ppm sulfur for fourteen (14) hours, then operated with a hydrocarbon fuel containing 1000 ppm sulfur for twelve (12) hours and finally operated with a hydrocarbon fuel containing 5000 ppm sulfur for eight (8) hours. In the second test, the cell was operated with a hydrocarbon fuel containing 5000 ppm sulfur for seven (7) hours. In the third test, the fuel cell was operated with hydrocarbon fuel containing 500 ppm sulfur for twenty (20) hours. The copper-ceria-yttria stabilized zirconia anode of the cell was subjected to x-ray diffraction measurements after completion of each of these three tests, and the results are shown in **FIGURE 9** by lines under the letters "a-c." The diffraction data represented by "a" suggest that a new phase of ceria with a diffraction peak near  $39^\circ$  is formed at high levels of sulfur. The diffraction data from the third test (represented by "c") further indicate that moderate levels of sulfur do not lead to the

formation of this new sulfided phase as a result of the presence of sulfur-containing species. In all three measurements, the peak at about 43° due to the metallic copper phase is clearly visible. This result is consistent with the results in EXAMPLE 6, which tend to show that the sulfur had no effect on the copper.

5

#### EXAMPLE 8

The fuel cells of EXAMPLES 1 and 2 were tested under conditions set forth in EXAMPLE 4 with commercial gasoline used as the fuel. The fuel was 40 wt% gasoline in dry nitrogen gas. The results are shown in FIGURE 10. FIGURE 10 indicates that voltage and current density of the cell are stable over twelve (12) hours. This test was repeated with a 10 wt% gasoline in dry nitrogen for an additional forty-eight hours. The results of the repeated test, which are shown in FIGURE 11, indicate that power generation by the cell remained stable over this additional period. These results demonstrate that the cell is capable of being operated over a considerable period of time with commercial gasoline.

After the completion of this testing, the anode of the fuel cell again underwent an x-ray diffraction measurement. The x-ray diffraction result showed lines characteristic of copper, ceria and yttria stabilized zirconia. No lines were observed which would be characteristic of sulfur-containing species. This x-ray diffraction data indicates that the sulfur present in a commercial grade of gasoline has no effect on the anode.

15

#### EXAMPLE 9

The fuel cell with a copper-ceria-yttria stabilized zirconia was prepared and operated according to EXAMPLE 4 at 700°C with different fuel mixtures. The initial mixture employed was (n-decane containing 100 ppm sulfur (presented as "thiophene")) : steam: nitrogen gas in a ratio of 2:2:2. The next mixture employed was (n-decane containing 5000

20

ppm sulfur): steam:N<sub>2</sub> in a ratio of 2:2:2. After the mixture was replaced with steam, hydrocarbon mixtures of pure decane and decane containing 5000 ppm sulfur were used. The current density and voltage for the fuel cell for each of these mixtures are shown in **FIGURE 12**. **FIGURE 12** indicates that the fuel cell continues to operate after the switch to n-decane containing 5000 ppm sulfur but that the current density decreases with time. **FIGURE 12** also indicates that fuel cell efficiency is restored after treatment with steam and during use of n-decane fuel.

#### EXAMPLE 10

In this EXAMPLE using a freshly prepared cell, with an anode consisting of Cu<sub>2</sub>O, CeO<sub>2</sub>, and YSZ, the anode was treated by gradually heating to 700°C in hydrogen gas. During this heating step, electrical resistance across the anode was measured in ohms over time and temperature. The results are shown in **FIGURE 13**. **FIGURE 13** indicates that the resistance of the fuel cell conductor was lowered due to reduction of Cu<sub>2</sub>O to metallic Cu. The addition of a sulfur-containing fuel did not affect the resistivity of the Cu-containing anode, demonstrating the inertness of Cu to sulfur under these conditions.

#### EXAMPLE 11

In this EXAMPLE, a Ni-YSZ cermet was formed by mixing 40% wt. NiO, 60% wt. YSZ, with graphite pore former, in a typical tape-casting slurry. A second layer with pure YSZ was cast over this, and the two layers were calcined at 1500°C. After heating the resulting ceramic wafer to 700°C in H<sub>2</sub> to reduce the NiO to Ni, the wafer was boiled in HNO<sub>3</sub> to remove Ni. The weight change demonstrates that Ni was completely removed. Next, a 50% YSZ, 50% Sr-doped LaMnO<sub>3</sub> powder was applied to the dense side of the two-

layer wafer to form a cathode.  $\text{Cu}(\text{NO}_3)_2$  and  $\text{Ce}(\text{NO}_3)_3$  were then impregnated into the porous side of the wafer, heated to decompose the nitrate, and reduced in  $\text{H}_2$  at  $700^\circ\text{C}$ .

#### EXAMPLE 12

The cell potential as compared to current density curves for the fuel cell described in  
5 **EXAMPLE 11** were measured at  $700^\circ\text{C}$  in flowing  $\text{H}_2$  and flowing butane, with the data shown in **FIGURE 14**.

These results indicate that the performance of the cells with hydrogen and hydrocarbon fuels is comparable to cells prepared in other manners. Furthermore, the performance of the cell in dry butane was stable. Operation of a SOFC with a Ni-based  
10 anode is not possible due to rapid coke formation.

#### EXAMPLE 13

Five nickel cermets were prepared by tape casting slurries of YSZ and NiO powders in ratios of YSZ to NiO of 70 : 30 (twice), 80 : 20, 90 : 10 and 60 : 40. All of the formulations also contained a graphite pore former.

15 The metal porosity and weight measurements were taken immediately after calcination of the green tapes in air at  $1550^\circ\text{C}$ . Subsequent measurements of porosity and weight were taken after heating the cermets in hydrogen gas (to reduce nickel oxide to nickel) and after leaching with boiling nitric acid. The results for porosity are given in **TABLE 1A**. The results for weight are given in **TABLE 1B**. The data demonstrate that essentially all of the  
20 Ni could be removed from the Ni cermet.

TABLE 1

A.

YSZ/NiO mass ratio	Graphite Added (%)	Initial Porosity	After H <sub>2</sub> Porosity	After leaching Porosity
70/30	22.2	0.362	0.431	0.455
80/20	32.9	0.414	0.474	0.460
90/10	32.9	0.405	0.432	0.430
70/30	15.2	0.425	0.472	0.564
60/40	—	—	0.384	0.419

B.

YSZ/NiO mass ratio	Initial Weight (g)	After H <sub>2</sub> Weight (g)	After leaching Weight (g)	Estimated Weight (g) of (a)	Weight Change (%)
70/30	0.74	0.70	0.55	0.52	21
80/20	0.55	0.52	0.40	0.44	23
90/10	0.81	0.79	0.74	0.73	6
70/30	0.86	0.80	0.62	0.60	22
60/40	1.13	1.06	0.78	0.68	26

(a) Estimated weight is based on the assumption that Ni can be leached completely.

While in the foregoing specification, this invention has been described and exemplified in relation to certain preferred embodiments thereof, and many details have been set forth for purposes of illustration, it will be apparent to those skilled in the art that the invention is susceptible to additional embodiments and that certain of the details described herein can be varied considerably without departing from the basic principles of the invention.

**What Is Claimed:**

1. A solid oxide fuel cell comprising:
  - (a) a solid electrolyte comprised of an electronic insulator which allows transfer of anions, a ceramic-metal composite anode and a cathode;
  - 5 (b) a fuel comprising a sulfur-containing hydrocarbon having a sulfur content of from about 1 ppm to about 5000 ppm; and
  - (c) an oxygen source.
- 10 2. The fuel cell according to claim 1, wherein the hydrocarbon is a petroleum distillate.
3. The fuel cell according to claim 2, wherein the petroleum distillate is selected from the group consisting of gasoline, diesel oil, naphtha, JP-4, JP-5, JP-8, kerosene, motor oil, natural gas, fuel oil and mixtures thereof.
- 15 4. The fuel cell according to claim 3, wherein the petroleum distillate is selected from the group consisting of JP-4, JP-5, JP-8 and mixtures thereof.
5. The fuel cell according to claim 3 wherein the petroleum distillate is selected from the group consisting of naphtha, kerosene, fuel oil and mixtures thereof.

6. The fuel cell according to claim 3, wherein the petroleum distillate is selected from the group consisting of gasoline, diesel oil, natural gas and mixtures thereof.
7. The fuel cell according to claim 2, wherein the hydrocarbon comprises an alcohol.
8. The fuel cell according to claim 7, wherein the alcohol is selected from the group consisting of methanol, ethanol and mixtures thereof.
9. The fuel cell according to claim 2, wherein the hydrocarbon is selected from the group consisting of dry methane, butane, toluene, decane and mixtures thereof.
10. The fuel cell according to claim 1, wherein the sulfur-containing hydrocarbon fuel has a sulfur content of from about 1 ppm to about 1000 ppm.
11. The fuel cell according to claim 10, wherein the sulfur-containing hydrocarbon fuel has a sulfur content of from about 10 to about 1000 ppm.
12. The fuel cell according to claim 11, wherein the sulfur-containing hydrocarbon fuel has a sulfur content of from about 20 to about 1000 ppm.
13. The fuel cell according to claim 12, wherein the sulfur-containing hydrocarbon fuel has a sulfur content of from about 100 ppm to about 1000 ppm.

14. The fuel cell according to claim 13, wherein the sulfur-containing hydrocarbon fuel has a sulfur content of from about 250 ppm to about 1000 ppm.
15. The fuel cell of claim 1, wherein the solid electrolyte is an oxide ion conducting material.
16. The fuel cell of claim 15, wherein the oxide ion conducting material is selected from the group consisting of doped ceria, doped zirconia and doped lanthanum gallate.
17. The fuel cell of claim 16, wherein the doped ceria is selected from the group consisting of gadolinium doped ceria, samarium-doped ceria and yttria-doped ceria.
18. The fuel cell of claim 15, wherein the oxide ion conducting material is yttria-doped zirconia.
19. The fuel cell of claim 16, wherein the doped zirconia is scandium-doped zirconia.
20. A process of producing electrical energy, comprising:
- (a) providing a solid oxide fuel cell comprising a solid electrolyte that is an electronic insulator which allows transfer of anions, a ceramic metal composite anode and a cathode;
  - (b) contacting said cathode with an oxygen source; and



- (c) contacting said anode with a fuel comprising a sulfur-containing hydrocarbon having a sulfur content of from about 1ppm to about 5000 ppm.

21. The process according to claim 20, wherein the hydrocarbon is a petroleum distillate.

22. The process according to claim 21, wherein the petroleum distillate is selected from the group consisting of gasoline, diesel oil, naphtha, JP-4, JP-5, JP-8, kerosene, motor oil, natural gas, fuel oil and mixtures thereof.

23. The process according to claim 22, wherein the petroleum distillate is selected from the group consisting of JP-4, JP-5, JP-8 and mixtures thereof.

24. The process according to claim 22, wherein the petroleum distillate is selected from the group consisting of naphtha, kerosene, fuel oil and mixtures thereof.

25. The process according to claim 22, wherein the petroleum distillate comprises gasoline.

26. The process according to claim 22, wherein the petroleum distillate comprises diesel oil.

27. The process according to claim 20, wherein the hydrocarbon is selected from the group consisting of alcohols, dry methanes, butane, toluene, decane and mixtures thereof.
- 5 28. The process according to claim 27, wherein the hydrocarbon comprises an alcohol.
29. The process according to claim 28, wherein the alcohol is selected from the group consisting of methanol, ethanol and mixtures thereof.
- 10 30. The process according to claim 20, wherein the sulfur-containing hydrocarbon has a sulfur content of from about 10 ppm to about 1000 ppm.
31. A method of restoring the operability of a solid oxide fuel cell comprising a solid electrolyte comprised of an electronic insulator which allows transfer of anions, a ceramic-metal alloy composite anode and a cathode and which was deactivated by sulfur poisoning, said method comprising the step of heating the anode in a mixture containing steam.
- 15
32. A method according to claim 31, wherein the anode is heated in a gaseous mixture comprising steam.
- 20
33. A method according to claim 31, wherein the anode is heated at between about 600°C and about 800°C for a period of about one (1) hour to about three (3) hours.

34. A method of fabricating a porous cermet as a direct-oxidation anode material for a solid-oxide fuel cell, said method comprising:
- (a) providing a porous nickel-containing cermet, with Ni content between 10% and 60%;
  - 5 (b) contacting said cermet with a leaching agent to remove at least a portion of said nickel, thereby imparting additional porous character to said cermet;
  - (c) contacting said porous cermet with an impregnant comprising a soluble copper salt, thereby depositing said copper salt in the pores of said cermet;
  - (d) calcining the copper salt-impregnated cermet at a temperature sufficient to  
10 convert said copper salt to copper oxide; and
  - (e) reducing said copper oxide to elemental copper, thereby producing said direct-oxidation anode material.
35. The method of claim 34, wherein in step (b) all of the nickel is leached from said  
15 cermet.
36. The method according to claim 34, wherein in step (b) between about 50% and about 99% of the nickel is leached from said cermet.
- 20 37. The method of claim 36, wherein the cermet is impregnated with a soluble copper salt, which yields an amount of elemental copper that is approximately equivalent to the weight of elemental nickel leached from the cermet in step (b).

38. The method of claim 34 which comprises the further step of treating the direct-oxidation anode material with a cerium salt, which is converted to cerium oxide.
39. A method of fabricating a porous, multi-layer ceramic laminate as a direct oxidation anode with supported electrolyte structure for a solid-oxide fuel cell, said laminate comprising at least a first layer and a second layer, the second layer being relatively dense in comparison to the first layer, said method comprising:
- (a) preparing a first formulation in the form of a slurry comprising a binder, a carrier medium and a ceramic powder, at least a portion of said ceramic powder including nickel oxide and YSZ;
  - (b) forming said slurry into a first layer;
  - (c) preparing a second formulation in the form of a slurry comprising a binder, a carrier medium, and YSZ;
  - (d) forming said slurry into a second layer;
  - (e) forming an assemblage comprising said layer and said second layer, superposed one upon the other, thereby providing a laminate preform;
  - (f) heating said laminate preform to a temperature sufficient to sinter said ceramic powder;
  - (g) reducing at least a portion of the nickel oxide present in said sintered laminate to elemental nickel;
  - (h) contacting said sintered laminate with a leaching agent to remove at least a portion of said nickel thereby imparting a porous character to the first layer of said sintered laminate;

- (i) contacting the first layer of said sintered laminate with an impregnant comprising soluble copper salt, thereby depositing said salt in the pores of said sintered laminate;
- (j) calcining the copper salt impregnated sintered laminate at a temperature of at least 600°C, thereby converting said copper salt to copper oxide; and
- (k) reducing said copper oxide to elemental copper, thereby producing said direct-oxidation anode with supported electrolyte structure.

40. A method of fabricating a porous, multi-layer ceramic laminate as a direct oxidation anode with supported electrolyte structure for a solid-oxide fuel cell, said laminate comprising at least a first layer and a second layer, the second layer being relatively dense in comparison to the first layer, said method comprising:

- (a) preparing a first tape formulation in the form of a slurry comprising a binder, a carrier medium and a ceramic powder, at least a portion of said ceramic powder including nickel oxide and YSZ;
- (b) forming said slurry into a first tape;
- (c) preparing a second tape formulation in the form of a slurry comprising a binder, a carrier medium, and YSZ;
- (d) forming said slurry into a second tape;
- (e) forming an assemblage comprising said first anode tape and said second electrolyte tape, superposed one upon the other, thereby providing a laminate preform;

- (f) heating said laminate preform to a temperature sufficient to sinter said ceramic powder;
- (g) reducing at least a portion of the nickel oxide present in said sintered laminate to elemental nickel;
- 5 (h) contacting said sintered laminate with a leaching agent to remove at least a portion of said nickel thereby imparting a porous character to the first layer of said sintered laminate;
- (i) contacting the first layer of said sintered laminate with an impregnant comprising soluble copper salt, thereby depositing said salt in the pores of said  
10 sintered laminate;
- (j) calcining the copper salt impregnated sintered laminate at a temperature of at least 600C°, thereby converting said copper salt to copper oxide; and
- (k) reducing said copper oxide to elemental copper, thereby producing said direct-oxidation anode with supported electrolyte structure.

15

41. A method of fabricating a porous, multi-layer ceramic laminate as a direct oxidation anode with supported electrolyte structure for a solid-oxide fuel cell, said laminate comprising at least a first layer and a second layer, the second layer being relatively dense in comparison to the first layer, said method comprising:

20

- (a) preparing a first tape casting formulation in the form of a slurry comprising a binder, a carrier medium and a ceramic powder, at least a portion of said ceramic powder including nickel oxide and YSZ;

- (b) applying the slurry of said first tape casting formulation to a supporting substrate and forming said slurry into a first tape;
- (c) preparing a second tape casting formulation in the form of a slurry comprising a binder, a carrier medium, and YSZ;
- 5 (d) applying the slurry of said second tape casting formulation to a supporting substrate and forming said slurry into a second tape;
- (e) forming an assemblage comprising said first anode tape and said second electrolyte tape, superposed one upon the other, thereby providing a laminate preform;
- 10 (f) heating said laminate preform to a temperature sufficient to sinter said ceramic powder;
- (g) reducing at least a portion of the nickel oxide present in said sintered laminate to elemental nickel;
- (h) contacting said sintered laminate with a leaching agent to remove at least a  
15 portion of said nickel thereby imparting a porous character to the first layer of said sintered laminate;
- (i) contacting the first layer of said sintered laminate with an impregnant comprising soluble copper salt, thereby depositing said salt in the pores of said sintered laminate;
- 20 (j) calcining the copper salt impregnated sintered laminate at a temperature of at least 600°C, thereby converting said copper salt to copper oxide; and
- (k) reducing said copper oxide to elemental copper, thereby producing said direct-oxidation anode with supported electrolyte structure.

42. The method of claim 41, wherein the slurry of said second tape casting formulation is applied to said first tape, thereby forming the anode and electrolyte.

43. The method of claim 41, wherein in step (h) substantially all of the nickel is leached  
5 from the sintered laminate.

44. The method according to claim 41, wherein in step (h) between about 50% and about 99% of the nickel is leached from the sintered laminate.

10 45. The method of claim 44, wherein the laminate is impregnated with a soluble copper salt which yields an amount of elemental copper that is approximately equivalent to the weight of elemental nickel leached from the laminate in step (h).

15 46. The method of claim 41 which comprises the further step of treating the direct oxidation anode with supported electrolyte structure with a cerium salt, which is converted to cerium oxide.

47. The method of claim 41, wherein the first tape casting formulation further comprises an organic pore forming agent.

20

48. The method of claim 47, wherein said organic pore forming agent comprises powdered graphite.



49. The method of claim 41, wherein said leaching agent selectively dissolves nickel with no appreciable dissolution of YSZ.

50. The method of claim 49, wherein said leaching agent is heated nitric acid.

5

51. The method of claim 41, further comprising, prior to sintering:

(a) preparing a third tape casting formulation in the form of a slurry comprising a binder, a carrier and a ceramic powder, the coefficient of thermal expansion of said ceramic powder, when sintered, being compatible with that of sintered

10

YSZ;

(b) applying the slurry of said third tape casting formulation to a supporting substrate and forming said slurry into a third tape, the thickness of said third tape being relatively greater than the thickness of said second tape;

(c) perforating said third tape, thereby forming at least one aperture through the thickness of said tape; and

15

(d) superposing said perforated third tape on said laminate preform in contact with said first tape.

52. The method of claim 51, wherein said at least one aperture in said third tape has a periphery with a continuously curved outline.

20

53. The method of claim 41, wherein, after sintering, contacting of the first layer of said sintered laminate with said impregnant is effected by passing said impregnant through said at least one aperture in said third tape.

# SOFCs can theoretically operate on hydrocarbon fuels

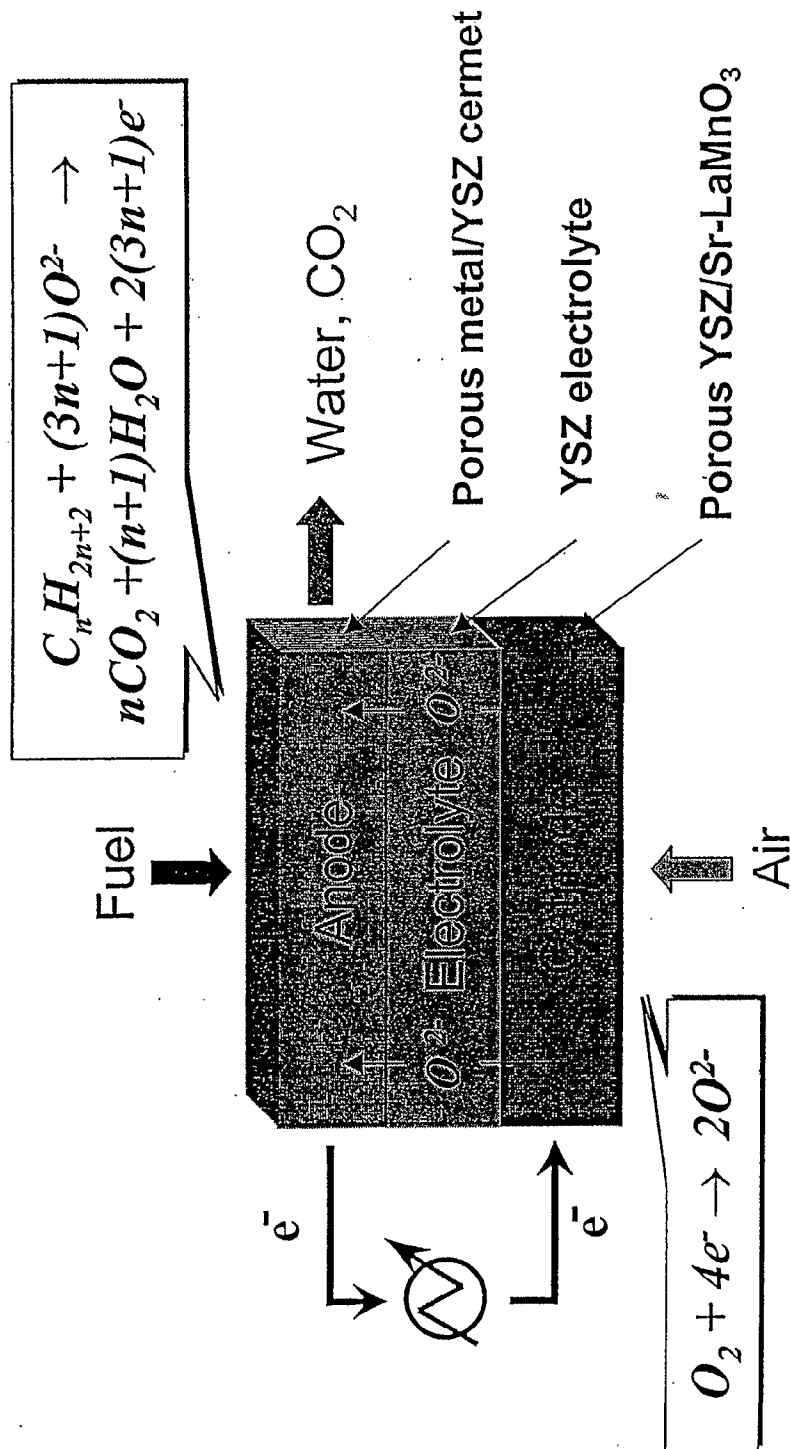


FIGURE 1A

Stable in liquid fuels


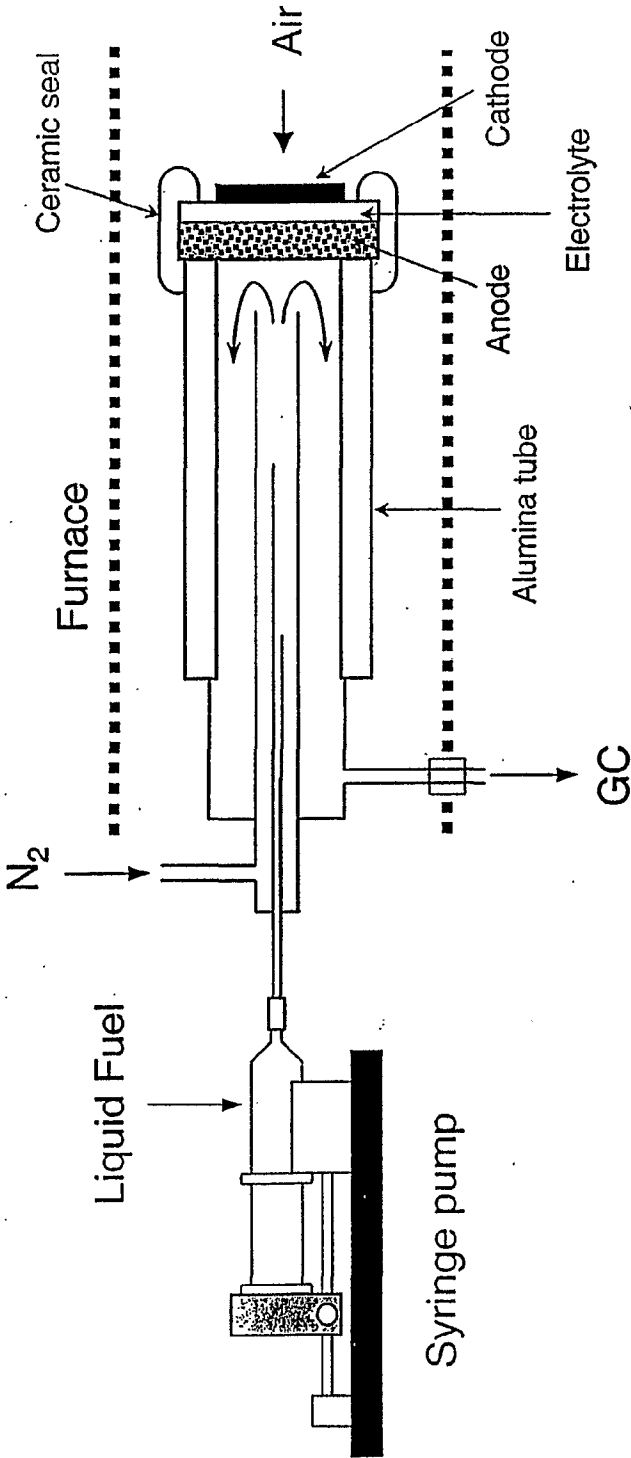



FIGURE 1B

# Fabrication methods:

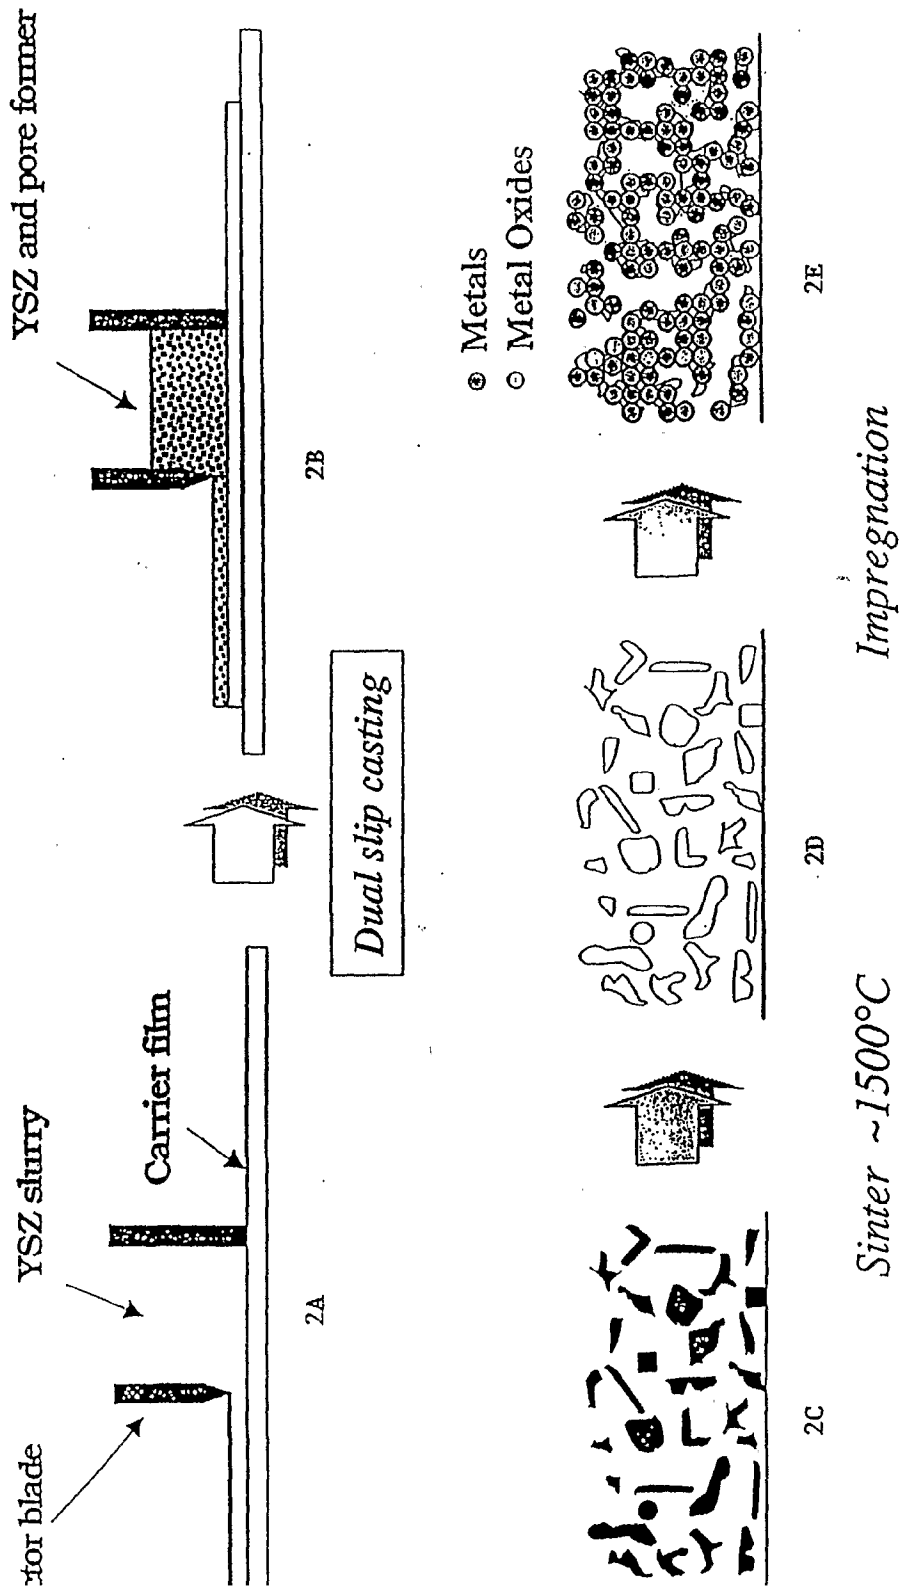

FIGURES  
2A - 2E

*We can remake Ni cermets.*

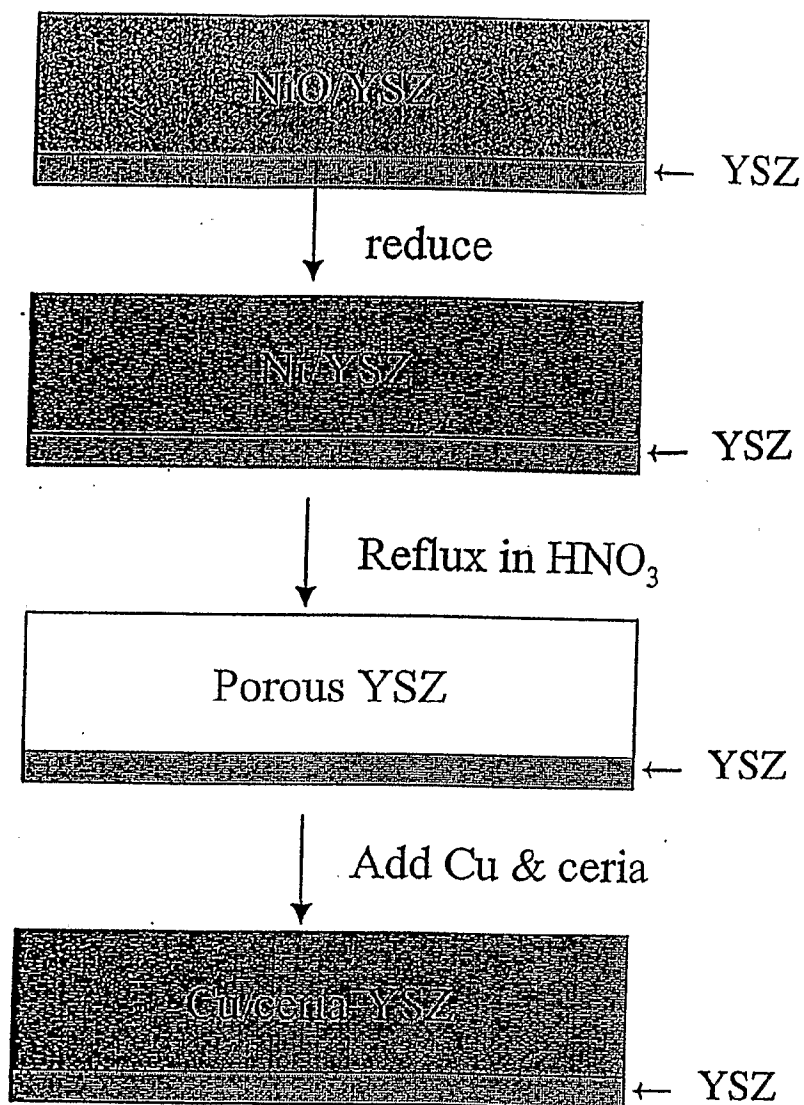

**FIGURE 3**

Can we make cells that are stronger?

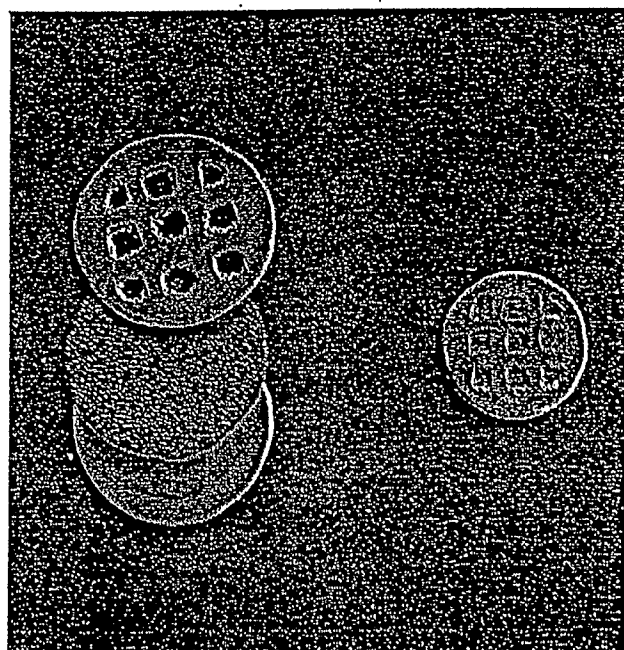


FIGURE 4A

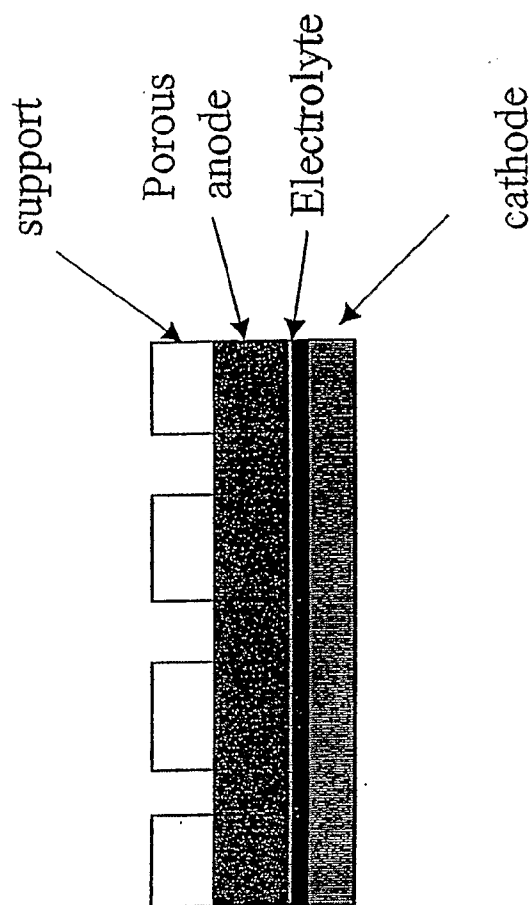


FIGURE 4B

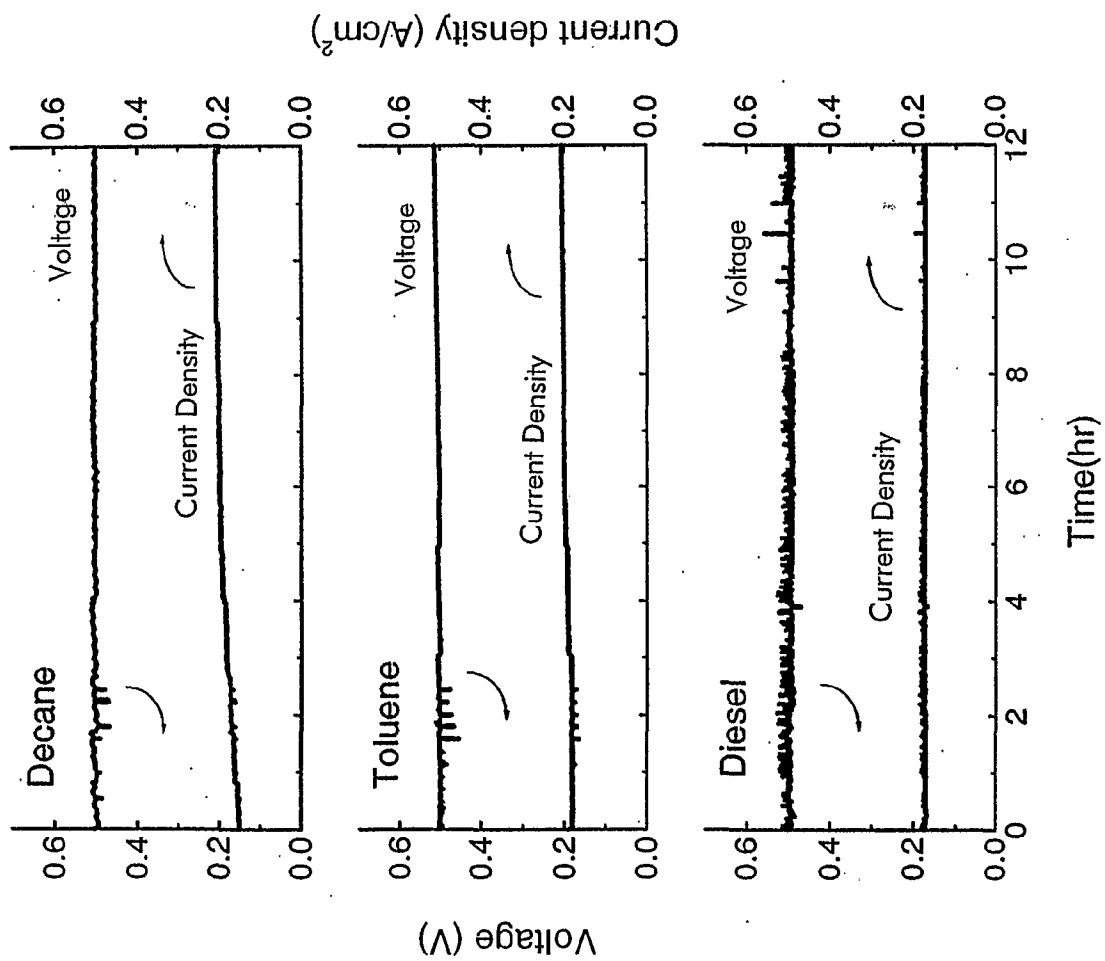


FIGURE 5



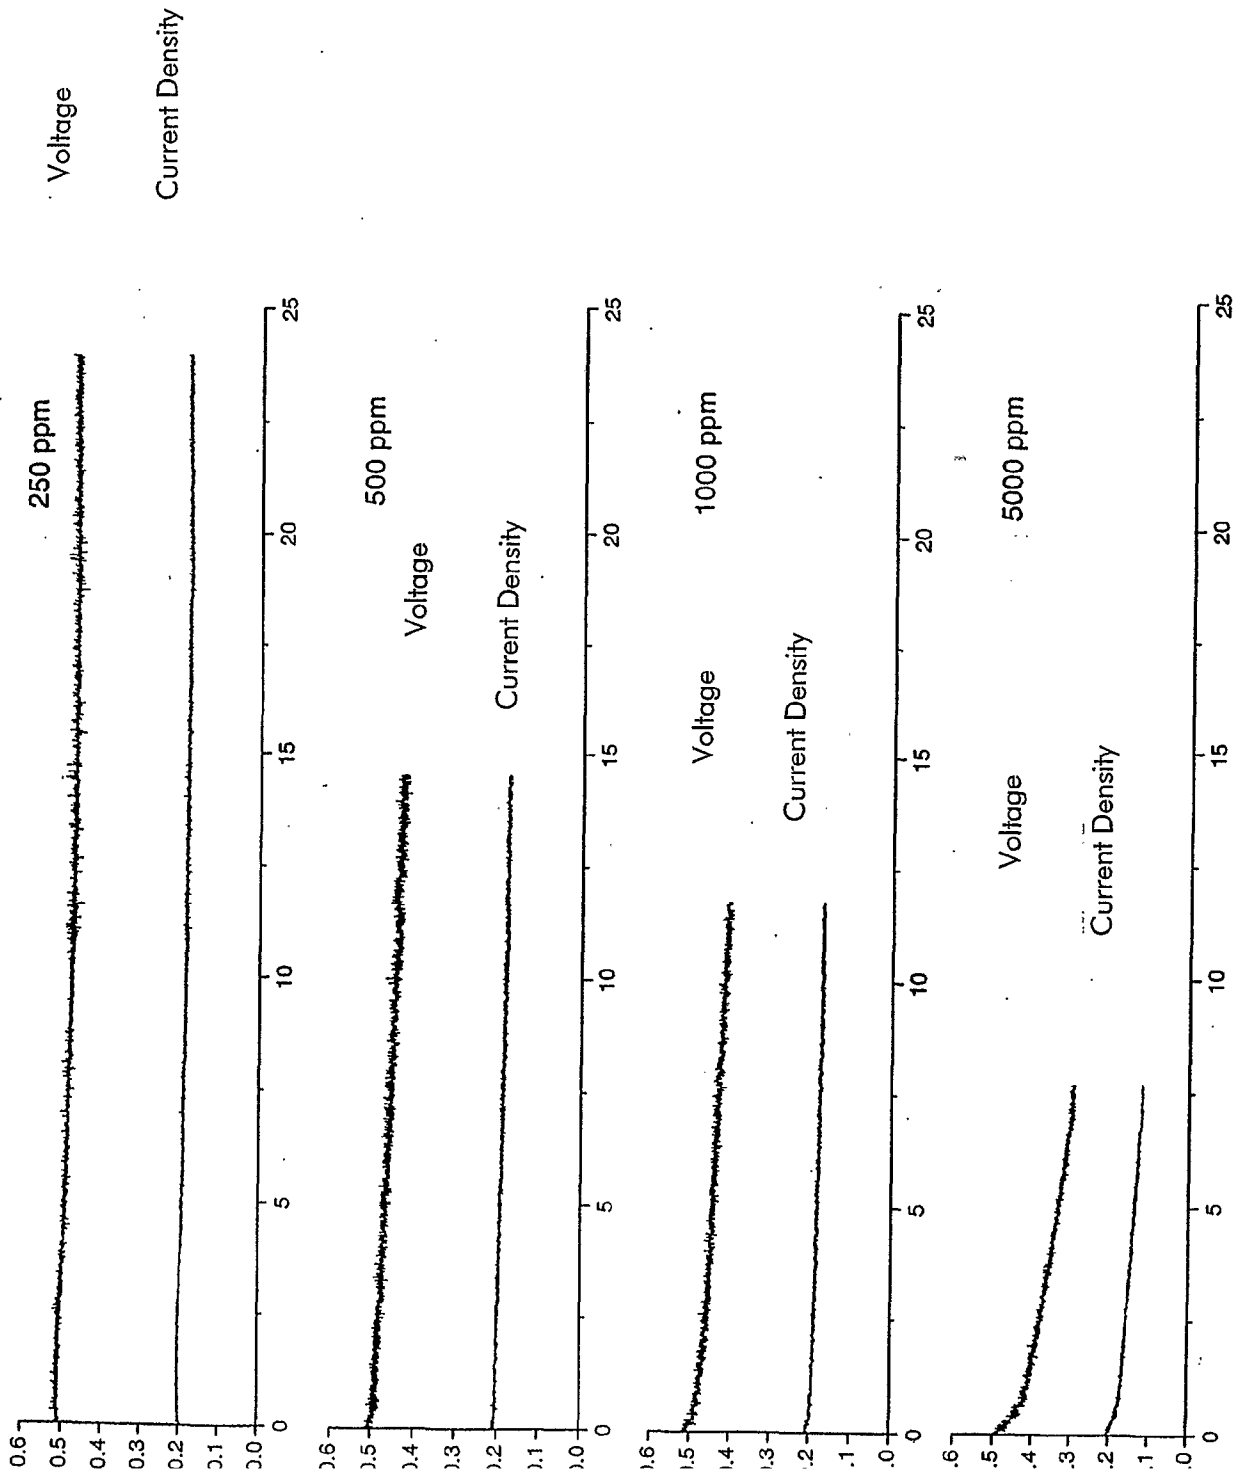


FIGURE 6

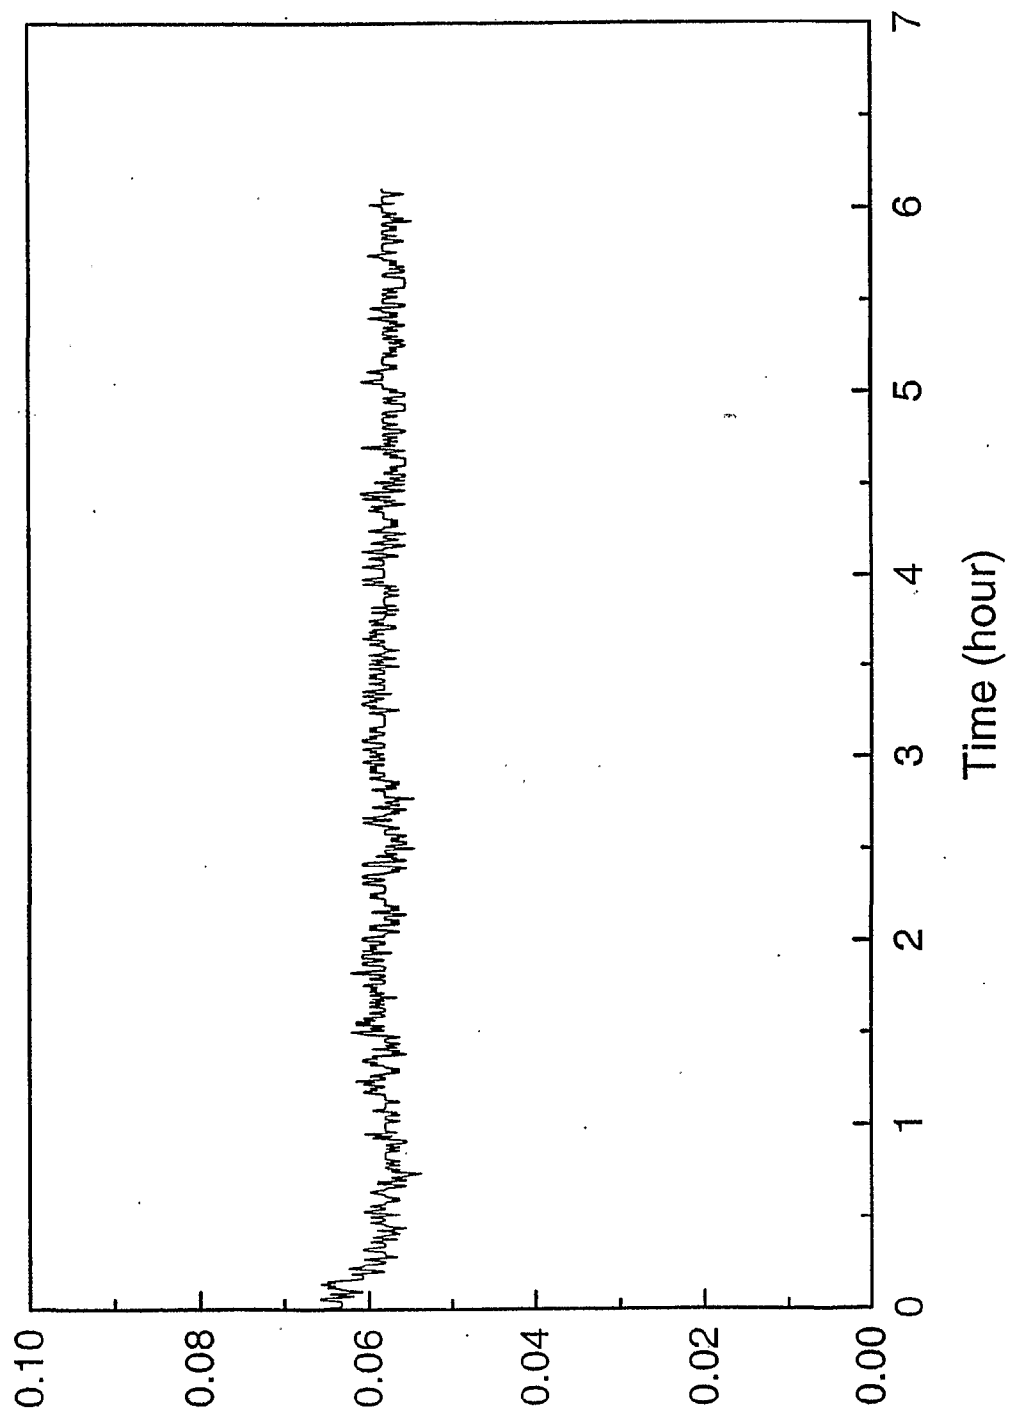


FIGURE 7

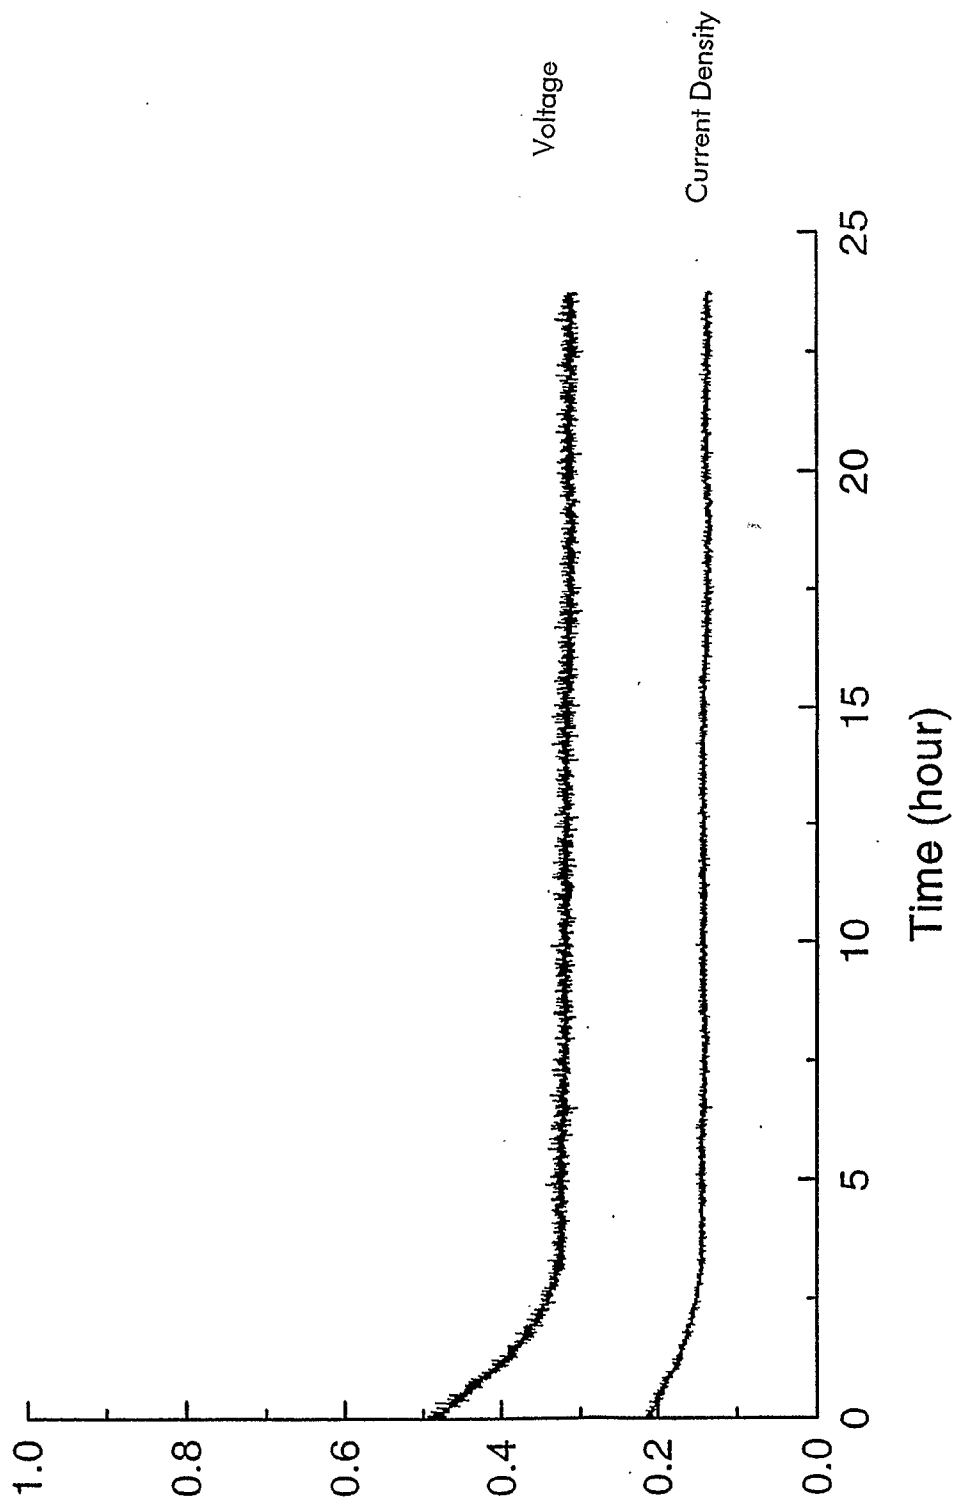


FIGURE 8

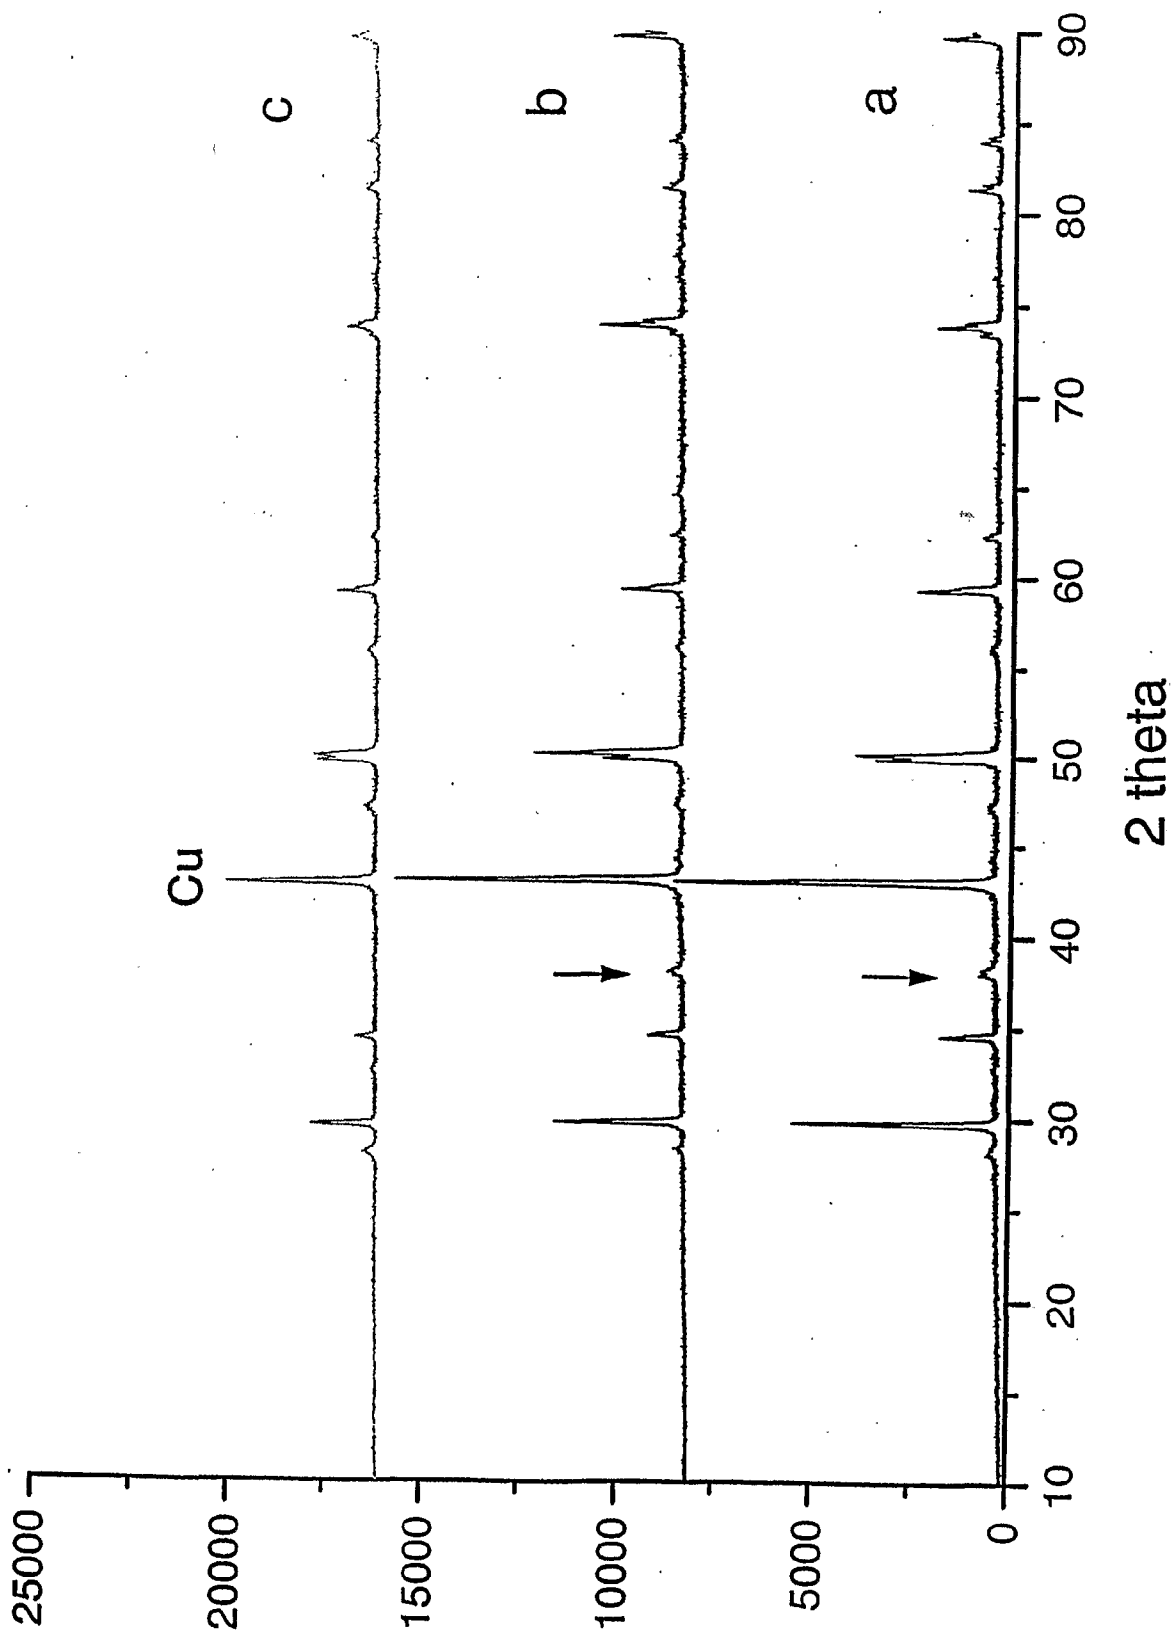
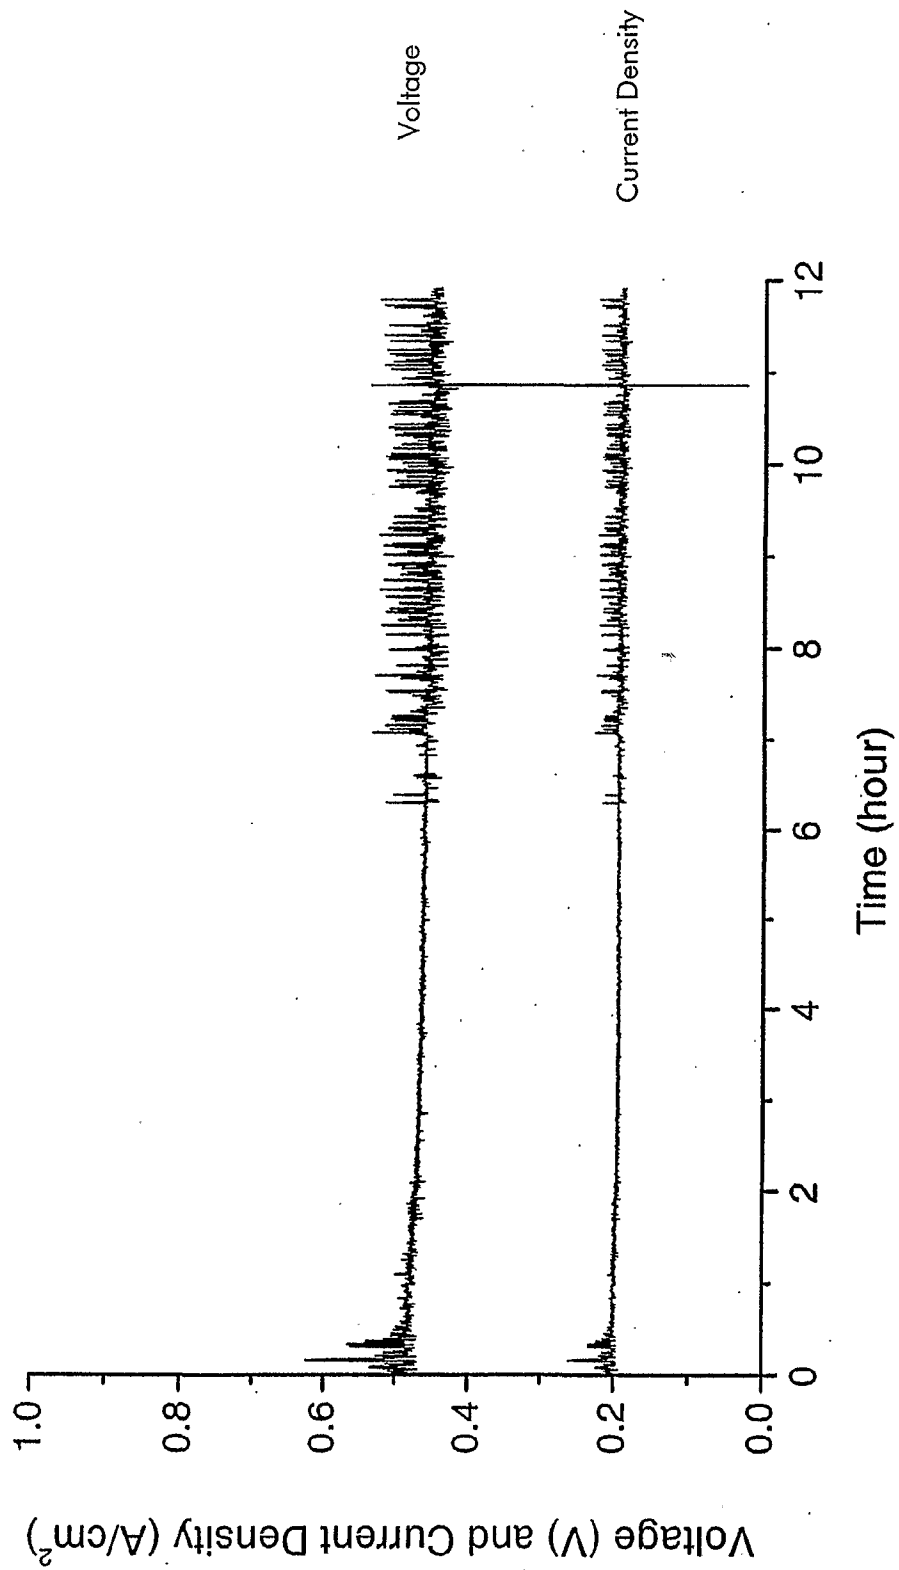


FIGURE 9

**100% Gasoline****FIGURE 10**

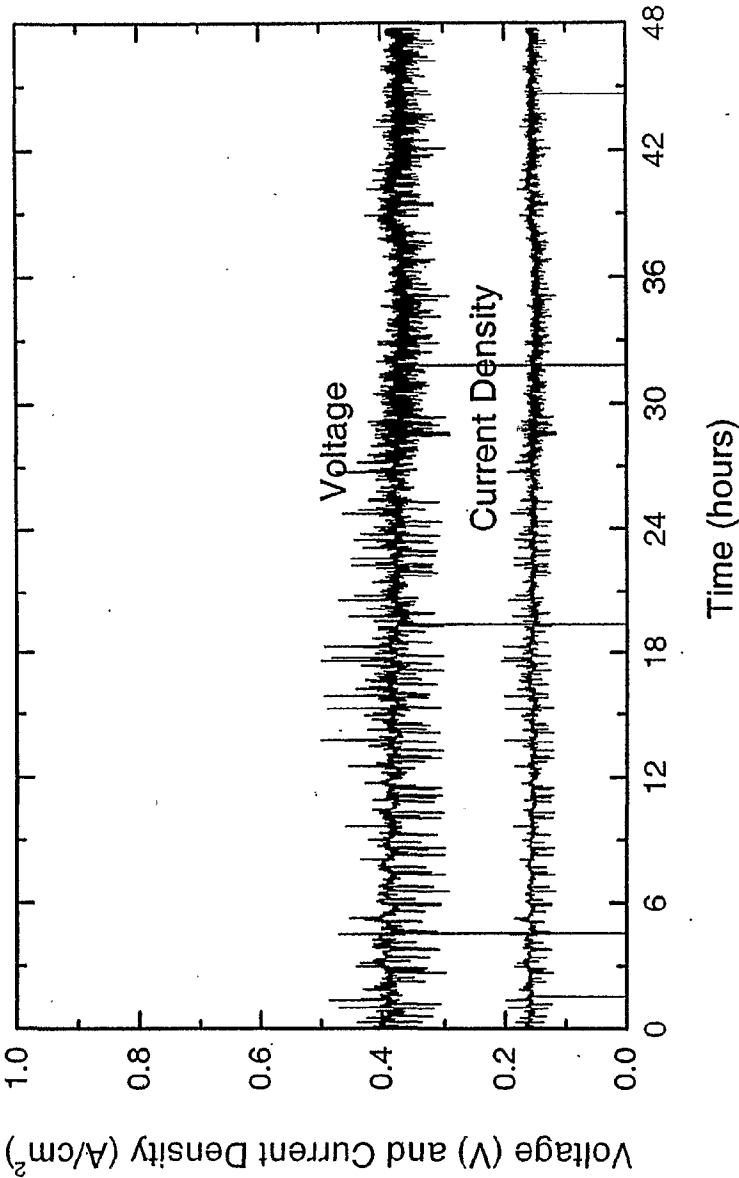


FIGURE 11

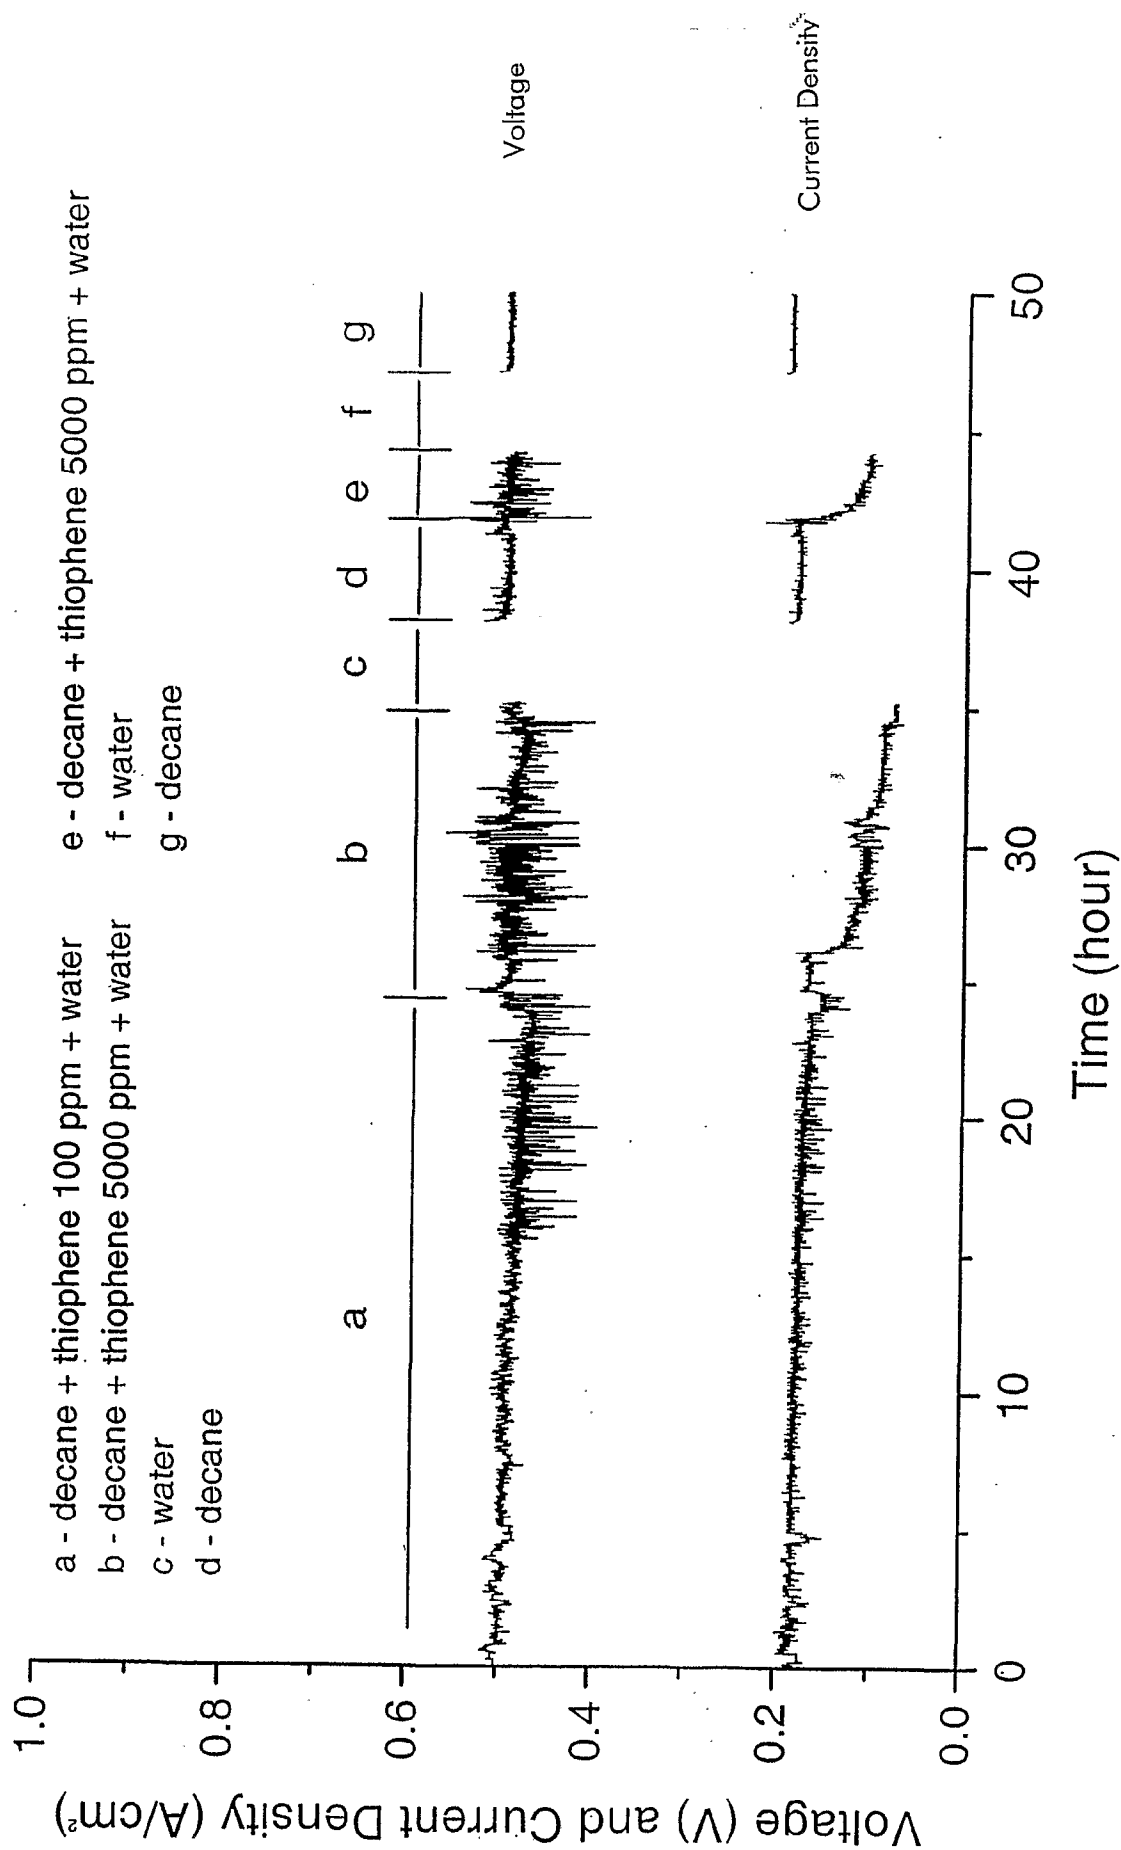


FIGURE 12

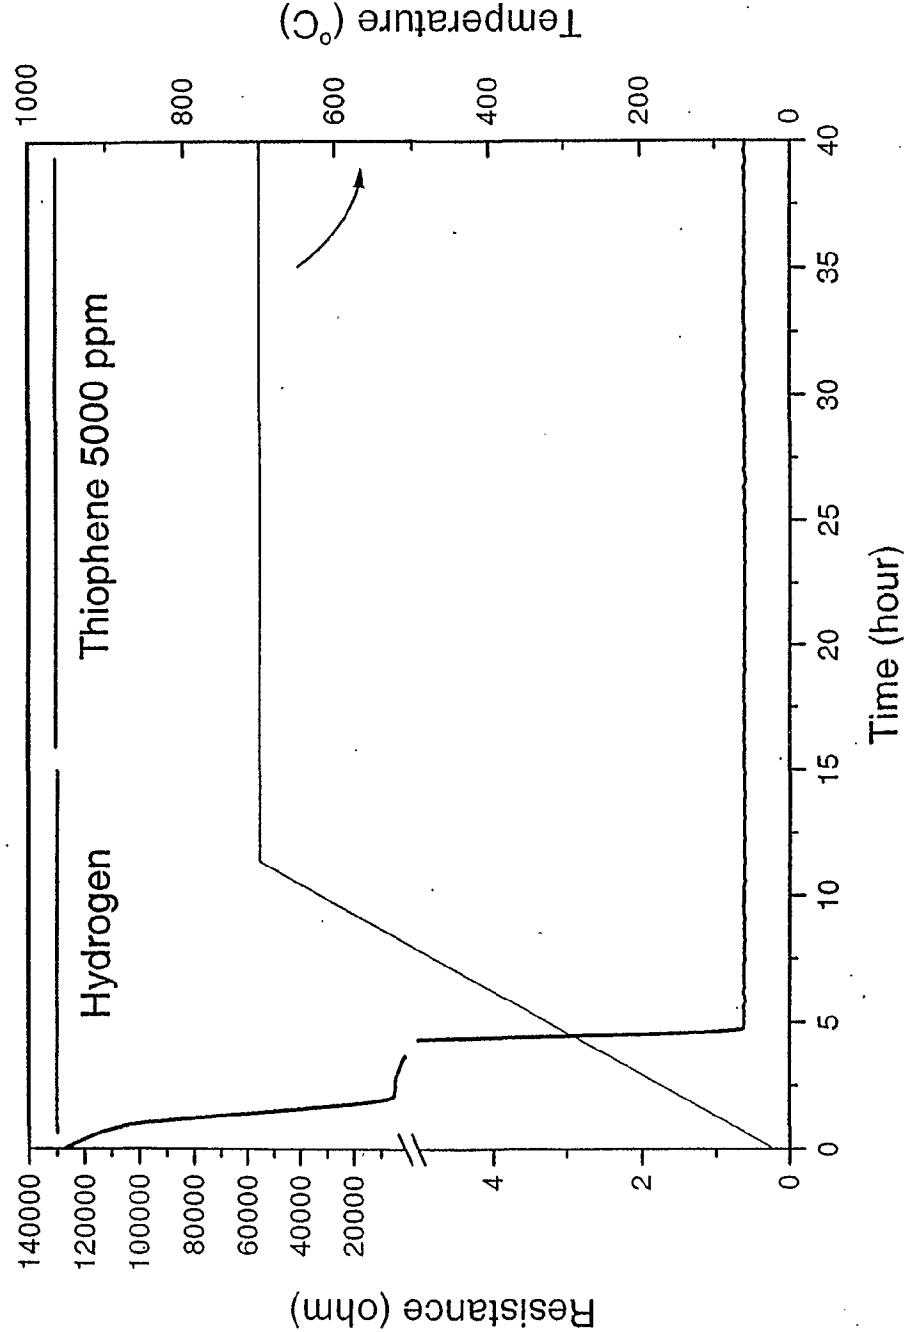


FIGURE 13



Cell made from 40%Ni/YSZ  
cermet, after removal of Ni and  
addition of ceria & Cu.

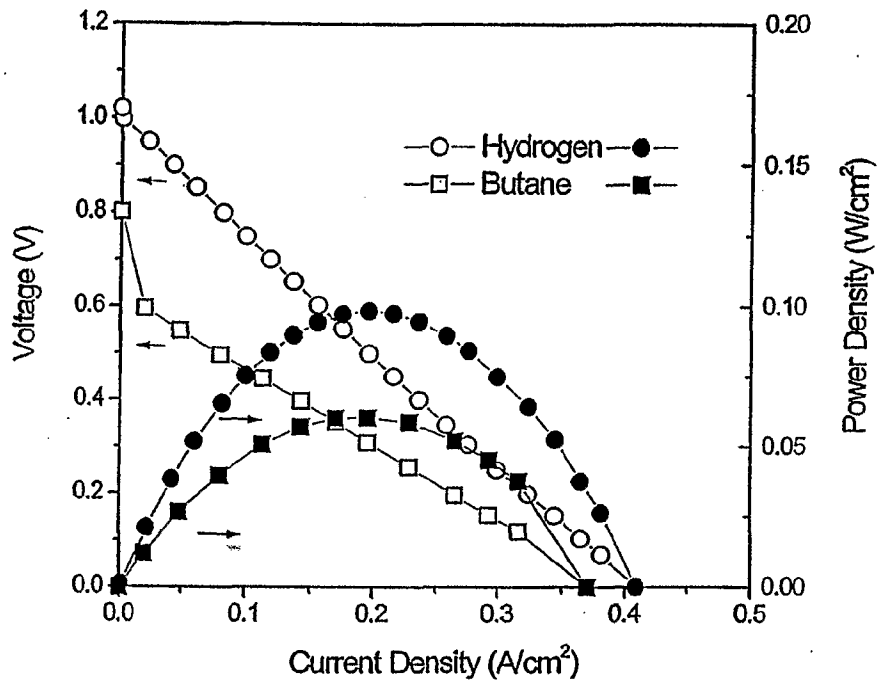


FIGURE 14

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 July 2002 (25.07.2002)

PCT

(10) International Publication Number  
**WO 02/058169 A3**

(51) International Patent Classification<sup>7</sup>: **H01M 08/10**,  
08/12, 08/18

(US). VOHS, John, M. [US/US]; 45 Sawgrass Lane, New-  
town Square, PA 19073 (US).

(21) International Application Number: PCT/US01/51149

(74) Agent: CHILD, John, S., Jr.; Dann, Dorfman, Herrell and  
Skillman, Suite 720, 1601 Market Street, Philadelphia, PA  
19103 (US).

(22) International Filing Date:  
9 November 2001 (09.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/247,444 9 November 2000 (09.11.2000) US  
60/269,525 19 February 2001 (19.02.2001) US  
60/308,313 27 July 2001 (27.07.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN,  
YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

(71) Applicant (*for all designated States except US*):  
**TRUSTEES OF THE UNIVERSITY OF PENN-  
SYLVANIA** [US/US]; 3700 Market Street, Suite 300,  
Philadelphia, PA 19104-3147 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): GORTE, Raymond,  
J. [US/US]; 512 Broad Acres Road, Narberth, PA 19072


Published:

— with international search report

[Continued on next page]

(54) Title: THE USE OF SULFUR-CONTAINING FUELS FOR DIRECT OXIDATION FUEL CELLS

## SOFCs can theoretically operate on hydrocarbon fuels

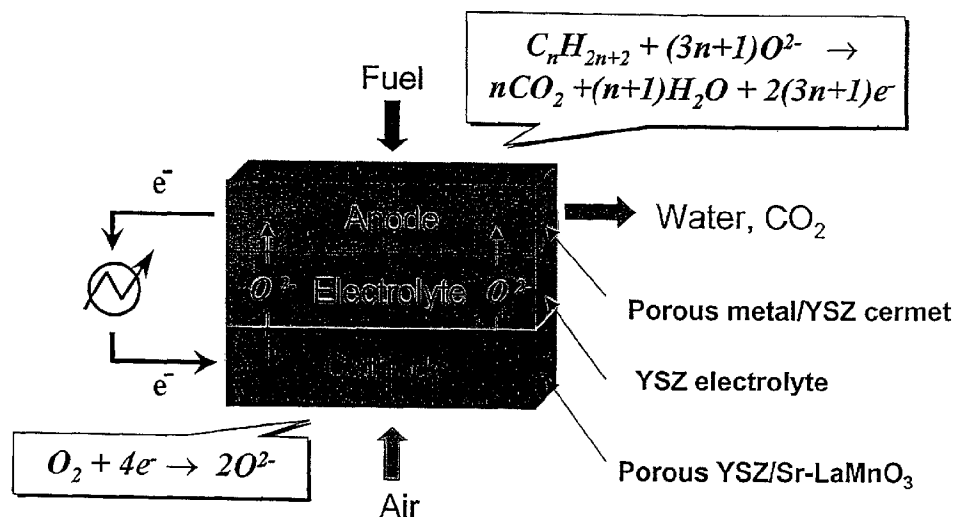

(57) Abstract: The invention relates to a solid oxide fuel cell which the fuel cell is a sulfur-containing hydrocarbon and the anode is a porous cermet.



**(88) Date of publication of the international search report:**  
17 April 2003

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/51149

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H01M/ 08/10, 12, 18  
US CL : 429/12, 13, 30, 31, 32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 429/12, 13, 30, 31, 32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Non Patent Literature

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,589,285A (CABLE et. al.) 31 December 1996 (31.12.96), columns 22-26.	1-30
---		
A		31-33
X	US 5,021,921A (SANO et. al.) 04 June 1991 (04.06.1991), columns 4-8.	34-53
X	US 6,139,666A (FASANO et. al.) 31 October 2000 (31.10.2000), columns 6-9.	34-53
A	US 5,071,718 (MARIANOWSKI et. al.) 10 December 1991 (10.12.1991), the whole document.	1-30
A, P	US 6,251,533B1 (CHRISTIANSEN) 26 June 2001 (26.06.2001), the whole document	34-53

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

01 August 2002 (01.08.2002)

Date of mailing of the international search report

20 NOV 2002

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Patrick Ryan

Telephone No. 703 308 0661

**BOX II. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING**

Group I, claim(s) 1-30, drawn to a solid oxide fuel cell capable of operating with hydrocarbons containing high sulfur concentrations.

Group II, claim(s) 31-33, drawn to a method of restoring operability of a solid oxide fuel cell.

Group III, claim(s) 34-53, drawn to a method of fabricating a porous metal/ceramic direct oxidation anode.

The inventions listed as Groups I-III do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: Claims 1-30 lack a special technical feature in common with Claims 31-53 because Claims 1-30 are anticipated by Cable et. al. (US Patent No. 5,589,285).